

TO: All Interested Parties  
FROM: Jessica Schultz, Deputy Director, Radar Operations Center (NWS) JS  
SUBJECT: Lowering the Minimum Scan Angle of the KCLX Weather Surveillance Radar - Model 1988 Doppler (WSR-88D) serving Charleston, SC, area  
DATE: April 22, 2019

In accordance with provisions of the National Environmental Policy Act of 1969, the National Weather Service (NWS) prepared a Draft Environmental Assessment (EA) analyzing the potential environmental effects of lowering the minimum scan angle of the KCLX WSR-88D serving the Charleston, SC, area. The Draft Environmental Assessment is available for public review and comment. The Draft EA may be obtained at:

<https://www.roc.noaa.gov/WSR88D/SafetyandEnv/EAReports.aspx>

The KCLX WSR-88D is an existing radar facility located at in rural Jasper County, SC, about 66 miles west of downtown Charleston, SC. The KCLX WSR-88D was commissioned in June 1996 and is one of 159 WSR-88Ds in the nationwide network. The KCLX WSR-88D antenna transmits a narrow focused main beam with a width of 1 degree. In normal operation, the radar antenna rotates horizontally to cover all directions (i.e. azimuths). The radar antenna also varies the scan angle at which it points with respect to the horizon. Currently, the WSR-88D operates at a minimum of scan angle of +0.5 degrees (deg) above the horizon. NWS proposes to reduce the minimum scan angle of the KCLX WSR-88D from the current minimum of +0.5 deg to +0.3 deg (i.e. 0.2 deg lower than existing) to provide enhanced coverage of the lower portions of the atmosphere. No construction activities or physical modification of the KCLX WSR-88D would be required to implement the proposed action; the only change would be to the radar's operating software.

**NWS will accept written comments on the Draft EA until May 31, 2019.** Please submit comments via either email or regular mail to:

James Manidakos  
Sensor Environmental LLC  
296 West Arbor Avenue  
Sunnyvale, CA 94085-3602

Email: [jmanidakos@sensorenvirollc.com](mailto:jmanidakos@sensorenvirollc.com)

Comments sent by regular mail must be postmarked by May 31, 2019. After the end of the review period, NWS will prepare a Final EA containing responses to all comments. NWS will not make any decision on implementing the proposed action until completion of the environmental review. Thank you for your interest in this important project.

**SENSOR ENVIRONMENTAL LLC**  
www.sensorenirollc.com

Draft Environmental Assessment Report • April 2019

**ENVIRONMENTAL ASSESSMENT (EA)**  
**LOWERING THE MINIMUM SCAN ANGLE OF THE WEATHER**  
**SURVEILLANCE RADAR - MODEL 1988, DOPPLER (WSR-88D)**  
**SERVING THE CHARLESTON, SOUTH CAROLINA, AREA**

Prepared by

James Manidakos, Project Manager  
Sensor Environmental LLC  
296 West Arbor Avenue  
Sunnyvale, CA 94085

Andre Tarpinian, Radio Frequency Engineer  
Alion Science and Technology  
306 Sentinel Drive  
Suite 300  
Annapolis-Junction, MD 20701

Prepared for

Edward Ciardi, General Engineer  
Centuria Corporation  
1851 Alexander Bell Drive, Suite 440  
Reston, VA, 20191

This page intentionally left blank.

## EXECUTIVE SUMMARY

The National Weather Service (NWS) owns and operates the existing Weather Surveillance Radar, Model 1988 Doppler (WSR-88D) serving the Charleston, SC, area. The International Civil Aviation Organization designator for the radar is KCLX and the radar is located in rural Jasper County, SC, about 66 miles west of downtown Charleston, SC. The KCLX WSR-88D was commissioned in June 1996 and has been in continuous operation since 1996. It is one of 159 WSR-88Ds in the nationwide network.

The KCLX WSR-88D is an S-band Doppler, dual polarized weather radar, which NWS uses to collect meteorological data to support weather forecasts and severe weather warnings for western South Carolina and eastern Georgia. The KCLX WSR-88D antenna transmits a narrow focused main beam with a width of 1 degree. In normal operation, the WSR-88D antenna rotates horizontally to cover all directions (i.e. azimuths). The radar antenna also varies the scan angle at which it points with respect to the horizon. The scan angle is measured along the axis of the main beam and can be changed in 0.1 deg increments. Currently, the KCLX WSR-88D operates at a minimum of scan angle of +0.5 degrees (deg) above the horizon. NWS proposes to reduce the minimum scan angle of the KCLX WSR-88D from the current minimum of +0.5 deg to +0.3 deg (the proposed action). Lowering the minimum scan angle would provide enhanced coverage of the lower portions of the atmosphere. No construction activities or physical modification of the KCLX WSR-88D would be required to implement the proposed action; the only change would be to the radar's operating software.

In April 1993, NWS prepared a National Environmental Policy Act (NEPA) document titled, *Supplemental Environmental Assessment (SEA) of the Effects of Electromagnetic Radiation from the WSR-88D Radar*. That document analyzed operating the WSR-88D at a minimum scan angle of +0.5 degree (deg). This Draft EA builds on that prior study by examining the possible effects of operating the KCLX WSR-88D at a minimum scan angle of +0.3 (i.e., 0.2 deg lower than the minimum scan angle examined in the April 1993 SEA). Operating this radar at a lower scan angle would increase the area of radar coverage, providing additional data on atmospheric conditions to NWS forecasters and other data users. The area covered at 2,000 ft above site level (ASL) would increase by 71.8%. Additionally the height of radar coverage over Myrtle Beach, SC, would be reduced from the current 10,000 ft to 7,400 ft above ground level (AGL). These radar coverage improvements would be very beneficial to NWS forecasters and others parties (e.g. public safety agencies and emergency responders) using the radar information.

The lower minimum scan angle would not result in the KCLX WSR-88D main beam impinging on the ground within three miles of the WSR-88D site. The proposed action would slightly increase radiofrequency (RF) exposure levels in the vicinity of the KCLX WSR-88D. As shown in Table S-1, during normal operation of the radar with rotating antenna, RF exposure would comply with the safety standards developed by the Institute of Electrical and Electronic Engineers (IEEE) and the adopted by the American National Standards Institute (ANSI) for the

general public and workers. Federal Communications Commission (FCC) and Occupational safety and Health Administration (OSHA) safety levels would also be met at all locations.

**Table S-1: RF Power Density within Main Beam of KCLX WSR-88D at Minimum Scan Angle of +0.3 deg Compared to ANSI/IEEE Safety Standards**

Location / Distance from Radar	Time-Averaged Power Density (mW/cm <sup>2</sup> )	ANSI/IEEE General Public RF Safety Standard		ANSI/IEEE Occupational RF Safety Standard	
		Safety Standard (mW/cm <sup>2</sup> )	Factor Below Std	Safety Standard (mW/cm <sup>2</sup> )	Factor Below Std
Surface of Radome	0.603	1.0	1.65	9.37	15.5
900 ft	0.0100	1.0	100	9.37	937
1 mile	0.00029	1.0	3,450	9.37	32,300
5 miles	0.000013	1.0	76,900	9.37	720,000

During infrequent stationary antenna operation, RF exposure levels within the WSR-88D main beam would exceed ANSI/IEEE and FCC safety levels for exposure of the general within 1,740 ft of the WSR-88D antenna. FCC occupational safety levels would be exceeded within 780 ft and ANSI//IEEE occupational safety levels within 563 ft. The KCLX WSR-88D operating at +0.3 deg would not impinge on the ground surface or any structures within those distance and risks to human health would not result.

Because the KCLX WSR-88D operates in a frequency band dedicated to government radiolocation services and the main beam would not impinge on the ground surface in the radar vicinity, the proposed action would not cause radio interference with television, radio, cellular telephone, personal communications devices (PCDs), electro-explosive devices, fuel handling, or active implantable medical devices.

WSR-88D RF emissions have the potential to cause electromagnetic interference (EMI) with sensitive equipment used at astronomical observatories. Two astronomical observatories are located within 150 miles of the KCLX WSR-88D. A minimum scan angle of +0.3 deg would not result in the WSR-88D main beam impinging on either of those two observatories.

Lowering the minimum scan angle of the KCLX WSR-88D would not require physical changes to the radar, vegetation removal, or ground disturbance. The proposed action would not result in significant effects in the following subject areas:

- Land Use and Coastal Zone Management
- Geology, Soils, and Seismic Hazards

- Drainage and Water Quality
- Transportation
- Air Quality
- Flood Hazards
- Wetlands
- Biological Resources / Protected Species
- Cultural and Historic Resources
- Environmental Justice Socioeconomic Impacts
- Farmlands
- Energy Consumption
- Visual Quality/ Light Emissions
- Solid and Hazardous Waste
- Wild and Scenic Rivers

NWS evaluated the benefits and potential impacts of lowering the minimum center of beam scan angle of the KCLX WSR-88D to each angle between +0.4 and -0.2 deg in 0.1 degree increments (see Appendix B). Operating the KCLX WSR-88D at alternative minimum scan angles between +0.4 deg and -0.1 deg would result in similar environmental effects as the proposed action. Like the proposed action, significant environmental effects would not result. A minimum scan angle of +0.4 would increase the radar's coverage area, but by less than the proposed action (i.e. minimum scan angle of +0.3) deg. A minimum scan angles of +0.2 deg would slightly increase coverage area at 2,000 ft ASL, but would not further lower the height of coverage over the Myrtle Beach, SC area. Additionally, a minimum scan angle of +0.2 deg or lower would result in increased ground clutter returns.

The no action alternative would result in continued operation of the KCLX WSR-88D at the existing minimum scan angle of +0.5 deg. The improvements in radar coverage resulting from the proposed project would not be achieved. The no-action alternative would not change RF exposure levels from existing. Under both the proposed action and the no action alternative, RF exposure during normal WSR-88D operations would conform to safety standards established by ANSI/IEEE, OSHA, and FCC. Similar to the proposed action, the no-action alternative would not cause significant effects to the natural or man-made environment.

The NWS will distribute the Draft EA to interested members of the public and government agencies for review and comment. Comments on the Draft EA will be accepted by NWS during a minimum 30-day comment period which will end on May 31, 2019. The NWS will provide official responses to all pertinent comments received during the Draft EA comment period in a Final EA report. The NWS will make a decision whether to implement the proposed lowering of the KCLX WSR-88D minimum scan angle after the Final EA report is completed.

This page intentionally left blank

**CONTENTS**

1  
2  
3 EXECUTIVE SUMMARY ..... i  
4 1 BACKGROUND AND SCOPE OF REPORT .....1  
5 2 PURPOSE AND NEED .....3  
6 3 DESCRIPTION OF PROPOSED ACTION AND ALTERNATIVES .....5  
7 4 ENVIRONMENTAL SETTING, CONSEQUENCES, AND MITIGATION.....15  
8 5 ALTERNATIVES TO THE PROPOSED ACTION .....29  
9 6 FINDINGS .....31  
10 7 DOCUMENT PREPARERS.....32  
11 8 REFERENCES.....33  
12 9 EA DISTRIBUTION .....36

13

14 APPENDIX A: RADIOFREQUENCY RADIATION POWER DENSITY  
15 CALCULATIONS

16 APPENDIX B: PROTECTED SPECIES LIST

17 APPENDIX C: TECHNICAL MEMORANDUM AND TRIP REPORT

18

19

20

21	<b>FIGURES</b>		
22	Figure 1	Photograph of KCLX WSR-88D serving the Charleston, SC, area	6
23	Figure 2	Location of KCLX WSR-88D serving the Charleston, SC, area	7
24	Figure 3	Schematic of WSR-88D Main Beam	9
25	Figure 4	Drawing Showing Proposed Additional Radar Coverage	10
26	Figure 5	Existing and Proposed KCLX WSR-88D Coverage at 2,000 ft above Site Level	11
27	Figure 6	Existing and Proposed KCLX WSR-88D Coverage at 5,000 ft above Site Level	12
28	Figure 7	Existing and Proposed KCLX WSR-88D Coverage at 10,000 ft above Site Level	13

29			
30	<b>TABLES</b>		
31	Table 1	Information on the KCLX WSR-88D Serving the Charleston, SC, Area	5
32	Table 2	Coverage Area for KCLX WSR-88D at Minimum Scan Angle of +0.3 deg	8
33	Table 3	RF Power Density within KCLX WSR-88D Main Beam Compared to ANSI/IEEE	
34		Safety Standards	17
35	Table 4	Astronomical Observatories within 150 Miles of the KCLX WSR-88D	20
36	Table 5	RF Effects of KCLX WSR-88D on Equipment and Activities	21
37	Table 6	Endangered and Threatened Species Potentially Occurring near the WSR-88D	24

## ABBREVIATIONS

AGL	above ground level
AAMI	Association for Advancement of Medical Instrumentation
ANSI	American National Standards Institute
ASL	above site level
deg	degree(s)
DoA	Department of Agriculture
EA	Environmental Assessment
E.O.	Executive Order
EED	electro-explosive device
EMI	electromagnetic interference
EPA	Environmental Protection Agency
ESA	Endangered Species Act
FCC	Federal Communications Commission
FEMA	Federal Emergency Management Agency
FONSI	Finding of No Significant Impact
ft	foot, feet
HERO	Hazards of Electromagnetic Radiation to Ordnance
IEEE	Institute of Electrical and Electronics Engineers
JSPO	Joint System Program Office
KCLX	WSR-88D serving the Charleston, SC, area
m	meter(s)
MBTA	Migratory Bird Treaty Act (of 1918)
MHz	megahertz
mi	mile(s)
MPE	maximum permissible exposure
MSL	mean sea level
mW/cm <sup>2</sup>	milliwatts per square centimeter
NAO	NOAA Administrative Order
NEPA	National Environmental Policy Act
NEXRAD	Next Generation Weather Radar (also known as WSR-88D)

NOAA	National Oceanic and Atmospheric Administration
NRCS	Natural Resources Conservation Service
NTIA	National Telecommunications and Information Agency
NWS	National Weather Service
PEIS	Programmatic Environmental Impact Statement
RF	radiofrequency
SEA	Supplemental Environmental Assessment
SHPO	State Historic Preservation Office
sq mi	square mile(s)
std	standard
U.S.	United States
USAF	U.S. Air Force
USFWS	U.S. Fish and Wildlife Service
USGS	U.S. Geological Survey
WSR-88D	Weather Surveillance Radar – 1988, Doppler

# 1 BACKGROUND AND SCOPE OF REPORT

## 1.1 BACKGROUND

The National Weather Service (NWS) operates a nationwide network of weather radars that provide critical real-time information on atmospheric conditions to weather forecasters. Additional similar weather radars located in Alaska, Hawaii and Puerto Rico are operated by the Department of Transportation Federal Aviation Administration (FAA). The Department of Defense Air Weather Service also operates weather radars located at United States (U.S.) military installations in the U.S. and abroad. The weather radars operated by these three agencies are part of 159 WSR-88Ds in the nationwide network.

The network radars operated by NWS are named Weather Surveillance Radar-Model 1988 Doppler (WSR-88D) after the year they were first put into service and their capabilities to use Doppler shift measurements to determine wind velocities. They are also known as Next Generation Weather Radars (NEXRADs) or Weather Service Radars. Like all active radars, the WSR-88D transmits a radio signal, which reflects off targets and returns to the radar. The radar measures the strength of the return signal, its direction of return, and the time between transmission and return, which allows determination of the targets characteristics. Because the WSR-88D has the potential to cause electromagnetic effects on the environment, NWS carefully considered these effects and strives to prevent effects, or when effects cannot be avoided, mitigate the significance of those effects. To that end, the NEXRAD Joint System Program Office (JSPO) prepared environmental reports evaluating potential electromagnetic effects of the WSR-88D during planning and implementation of the WSR-88D network. In 1984, the JSPO issued the first environmental document which considered electromagnetic effects (among other effects). That report is titled: *Next Generation Weather Radar Programmatic Environmental Impact Statement (PEIS), Report R400-PE201* [NWS, 1984]. In 1993, JSPO issued a supplemental report updating the analysis contained in the 1984 PEIS to account for changes since 1984 in electromagnetic standards and guidelines and developments in radar design and operational modes. The supplemental report is titled *Final Supplemental Environmental Assessment (SEA) of the Effects of Electromagnetic Radiation from the WSR-88D Radar* [NEXRAD JSPO, 1993]. The 1993 SEA analyzed the potential electromagnetic effects of operating the WSR-88D at a minimum scan angle of +0.5 degree (deg) above horizontal, measured at the center of the WSR-88D main beam. The minimum scan angle of +0.5 deg represented the lowest scan angle used operation of the WSR-88Ds at that time.

The National Weather Service (NWS) owns and operates the WSR-88D serving the Charleston, SC, area. The radar identifier is KCLX and the radar is located in rural portion of Jasper County, SC, about 66 miles west of downtown Charleston. The KCLX WSR-88D is part of the nationwide WSR-88D network. The NWS proposes to operate the KCLX WSR-88D at a

minimum scan angle of +0.3 deg, which is lower than the current minimum scan angle of +0.5 deg above the horizon. Operating the KCLX WSR-88D at this lower scan angle was not analyzed in the 1993 SEA.

The National Oceanic and Atmospheric Administration (NOAA), the parent agency of NWS, require analysis of the potential environmental consequences of proposed actions to comply with the National Environmental Policy Act (NEPA). Procedures to be followed are set forth in NOAA Administrative Order (NAO) 216-6A (NOAA, 2016). Because NWS's proposed action of operating the KCLX WSR-88D at a minimum scan angle below +0.5 deg has the potential to cause environmental effects, there is a need to analyze potential environmental consequences, determine their significance, and develop measures to mitigate adverse impacts if necessary.

## **1.2 SCOPE OF REPORT**

This Draft EA report analyzes the potential effects on persons and activities in the vicinity that could result from implementing the proposed action (i.e. lowering the KCLX WSR-88D minimum scan angle to +0.3 deg). Potential environmental effects of alternative minimum scan angles between +0.4 deg and -0.2 deg and the no-action alternative (i.e. continued operation of the KCLX WSR-88D at the current minimum scan angle of +0.5 deg) are also considered for comparison purposes. As part of that analysis, the findings of the 1993 SEA have been updated to account for changes in safety standards and guidelines that have been occurred since 1993 and site -specific conditions at the KCLX WSR-88D site and vicinity. The scope of this EA is limited to analyzing potential effects from lowering the minimum scan angle of the KCLX WSR-88D. Because the types of electromagnetic effects that may result and their significance depends on local conditions, including uses and topography of the local area, the analysis and findings in this EA are specific to the KCLX WSR-88D, and are not applicable to other WSR-88Ds or the WSR-88D network as a whole.

## 2 PURPOSE AND NEED

The NWS is the nation's premiere meteorological forecasting organization. The agency's official mission is as follows:

“The National Weather Service (NWS) provides weather, hydrologic, and climate forecasts and warnings for the United States, its territories, adjacent waters and ocean areas, for the protection of life and property and the enhancement of the national economy. NWS data and products form a national information database and infrastructure which can be used by other governmental agencies, the private sector, the public, and the global community [NWS, 2009]”.

The nationwide network of 159 WSR-88Ds plays a crucial role in meeting the NWS mission. Data from the WSR-88Ds is used by the NWS to improve the accuracy of forecasts, watches, and warnings. As an example, the WSR-88D generates precipitation estimates allowing prediction of river flooding in hydrological basins of the area. The NWS then disseminates advance flood warnings to local and state public safety, emergency managers, and the public, allowing them to take appropriate actions to minimize hazards to life and property. Because the meteorological phenomena of greatest interest occurs with a few thousand feet (ft) of the ground surface, radar coverage of lower portions of the atmosphere is of great value to forecasters.

However, the elevation above the ground at which the WSR-88D can collect atmospheric data rises with distance from the radar due to earth curvature and the upward tilt of the radar beam, which is currently +0.5 deg or greater. The proposed action of lowering the WSR-88D minimum scan angle to +0.3 deg would expand the geographic area with radar coverage below 10,000 ft AGL, a substantial benefit to forecasters and other users of WSR-88D data. This EA report describes the improvements in radar coverage that would result if the NWS operates the KCLX WSR-88D serving the Charleston, SC, area at a minimum scan angle of +0.3 deg and the environmental effects that may result.

The National Oceanic and Atmospheric Administration (NOAA) is the parent agency of the NWS. NOAA requirements for complying with the National Environmental Policy Act (NEPA) are contained in NOAA Administrative Order (NAO) 216-6A, *Compliance with the National Environmental Policy Act, Executive Orders 12114, Environmental Effects Abroad of Major Federal Actions; 11988 and 13690, Floodplain Management; and 11990 Protection of Wetlands* (NOAA, 2016)], and the Companion Manual for NOAA Administrative Order 216-6A; Policies and Procedures for Compliance with the National Environmental Policy Act and Related Authorities (NOAA, 2017). NWS is subject to those requirements. Appendix E of the NOAA Companion Manual specifies the proper level of NEPA review for actions proposed by NOAA components and lists types of actions that are categorically excluded from the need to prepare a NEPA analysis document (e.g., an EA or environmental impact statement [EIS]). Categorical Exclusion G6, which addresses NEXRAD Radar Coverage, states that “Actions that change the

NEXRAD radar coverage patterns that do not lower the lowest scan angle and do not result in direct scanning of previously non-scanned terrain by the NEXRAD main beam” are categorically excluded from NEPA (NOAA, 2017). The proposed action would not meet these specifications and does not qualify for categorical exclusion treatment. Therefore, NEPA analysis is required for the proposed lowering of the KCLX WSR-88D minimum scan angle to +0.3 deg; this EA report satisfies that requirement.

### 3 DESCRIPTION OF PROPOSED ACTION AND ALTERNATIVES

#### 3.1 PROPOSED ACTION

##### 3.1.1 Description of KCLX WSR-88D

The NWS of the Department of Commerce, Air Force of the Department of Defense, and FAA of the Department of Transportation operate a nationwide network of Doppler meteorological radars, known as NEXRAD or WSR-88D. The WSR-88D collects data on weather conditions and provides critical inputs to forecasters. The network is composed of 159 radars, most of which were installed in the late 1980s and 1990s. Each radar includes a roughly 28-ft diameter dish antenna mounted on a steel lattice tower of varying height (depending on local conditions), and shelters housing electronic equipment, a standby power generator and fuel tank, and a transitional power maintenance system. The dish antenna rotates 360 deg and is covered by a fiberglass radome to protect it from the elements.

Figure 1 is a photograph of the KCLX WSR-88D, which was commissioned in October 1995 and has been in continuous operations since being commissioned. The KCLX WSR-88D serves the Charleston, SC, area and is operated and maintained by the NWS. The Charleston, SC, Weather Forecast Office (WFO) is the primary recipient of data from the KCLX WSR-88D and serves southern South Carolina and eastern Georgia. The KCLX WSR-88D is located in rural portion of Jasper County, about 66 miles west of downtown Charleston, SC (see Figure 2). The radar antenna, radome, and steel-lattice tower are standard. Table 1 provides information on the KCLX WSR-88D.


<b>Table 1: Information on the KCLX WSR-88D Serving the Charleston, SC, Area</b>	
Elevation, ground surface at tower base (mean sea level, MSL)	115 ft
Elevation, center of antenna (MSL)	228 ft
Tower Height (m)	30 m (98 ft)
Latitude (WGS84)	32°39'19.9" N
Longitude (WGS84)	81°02'31.9" W
Operating Frequency	2,810 megaHertz (MHz)
Spot Blanking or Sector Blanking used	No



**Figure 1: Photograph of KCLX WSR-88D serving Charleston, SC, Area**



Figure 2: Location of KCLX WSR-88D serving the Charleston, SC, area




### 3.1.2 Proposed Change in Minimum Scan Angle

The WSR-88D is designed to detect and track weather phenomena within a roughly 230 mi distance of the radar. It accomplishes this task by emitting a narrow main beam from a rotating dish antenna. The antenna rotates continuously around a vertical axis to cover the surrounding area. The main beam scan angle is the number of degrees above or below horizontal at the center of the main beam. The upward tilt of the antenna (and therefore the scan angle of the main beam) can be changed, allowing the radar to scan the sky at angles up to +60.0 deg and down to -1.0 deg; however, in current operation, the maximum scan angle is +19.5 deg and the minimum scan angle is +0.5 deg.


The WSR-88D main beam has a total width of 1 deg in the horizontal and vertical directions (i.e., beam edge is ½ deg from the center of the beam), as shown in Figure 3. The power density of the WSR-88D is greatest at the center of the beam and decreases towards the edge of the beam. At the edge of the main beam, the power density is one half of the center of beam power density. In current operation, the minimum scan angle of the main beam is +0.5 deg (i.e., 0.5 deg above horizontal at the center of the main beam) and the lower edge of the main beam (i.e. lower half-power point) is at 0.0 deg or horizontal. NWS proposes to reduce the minimum center of beam scan angle to +0.3 deg, which is 0.2 deg lower than the current minimum scan angle.

Figure 4 is a schematic drawing showing the change in coverage that would result from lowering the KCLX WSR-88D minimum scan angle. The floor of coverage would decrease slightly, but at a scan angle of +0.3 deg would not impinge on the ground surface in the vicinity of the radar. Because the lowered radar main beam would not be significantly obstructed by nearby terrain, buildings, or trees, the radar would cover portions of the atmosphere which are currently not covered. Table 1 shows the improvement in radar coverage that would be achieved, which ranges from 71.8% increase in coverage area at 2,000 ft above site level (ASL) to 28.3% increase at 10,000 ft ASL. Figures 5, 6, and 7 show the improvement in radar coverage at 2,000 ft, 5,000 ft, and 10,000 ft ASL, respectively. These improvements in WSR-88D coverage would be beneficial to NWS forecasters and other users of radar data (e.g. emergency response managers, water managers, transportation officials).

<b>Center of Beam Scan Angle (deg)</b>	<b>Coverage Floor (deg)</b>	<b>Area Covered at 2,000 ft ASL (sq mi)</b>	<b>Area Covered at 5,000 ft ASL (sq mi)</b>	<b>Area Covered at 10,000 ft ASL (sq mi)</b>
+0.5 (existing)	0.0	10,676	27,655	55,960
+0.3 (proposed)	-0.2	18,343 (+71.8%)	39,097 (41.4%)	71,800 (28.3%)

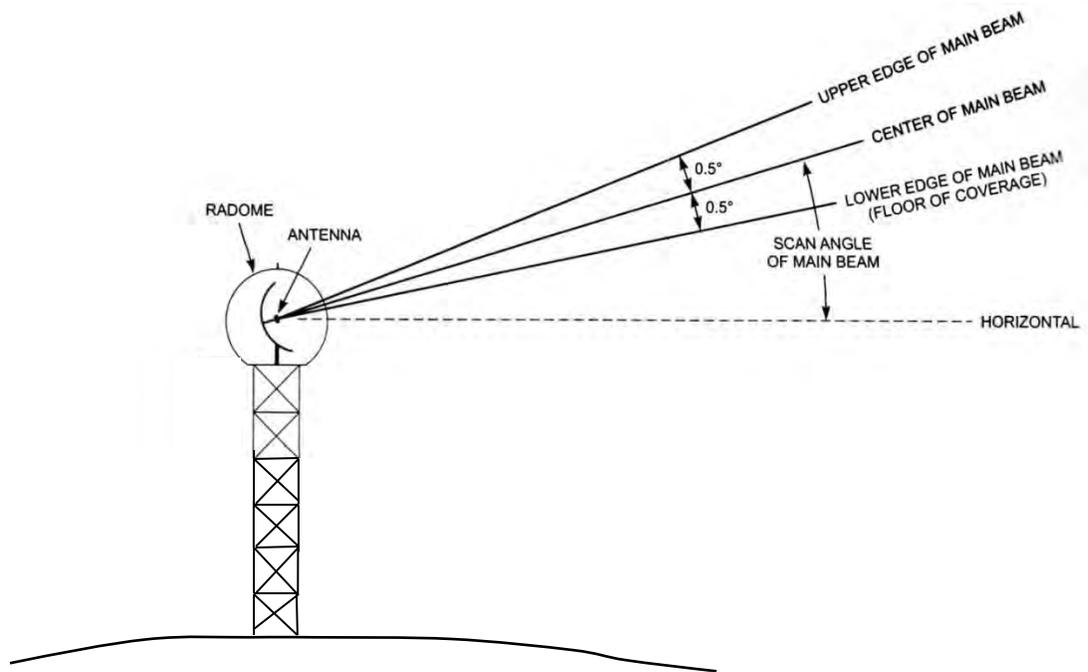

**Figure 3: Schematic of WSR-88D Main Beam**  
(Not to scale, width of main beam exaggerated)

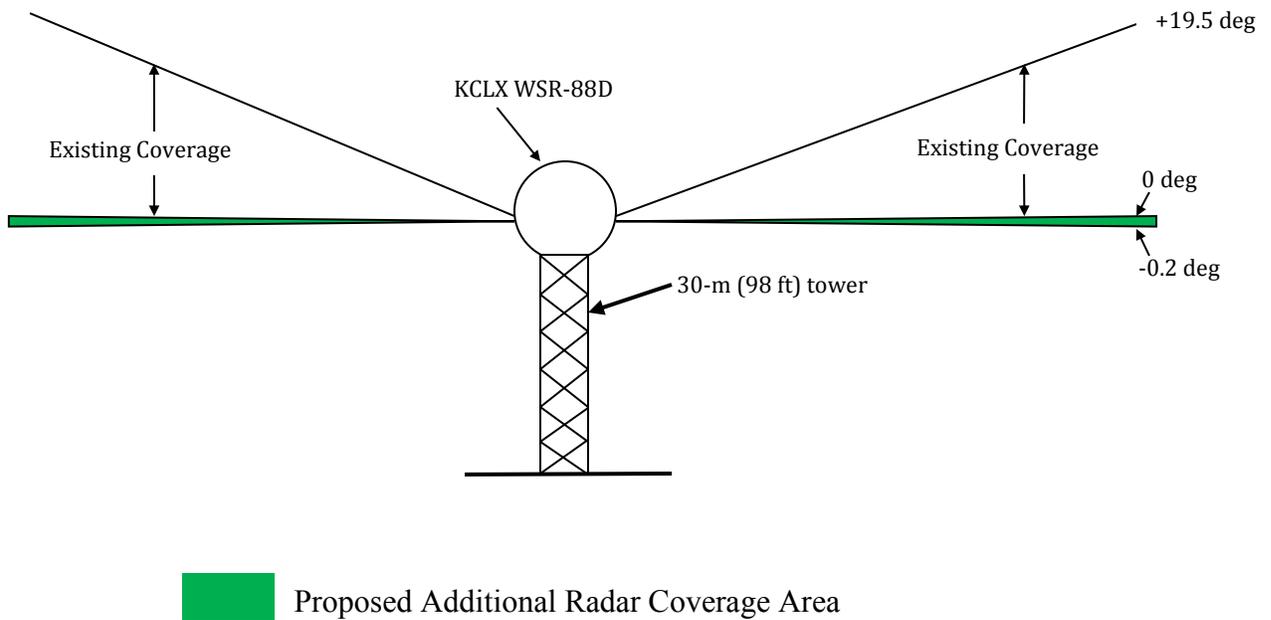

**Figure 4: Drawing Showing Proposed Additional Radar Coverage**



Figure 5: Existing and Proposed KCLX WSR-88D Coverage at 2,000 ft above Site Level

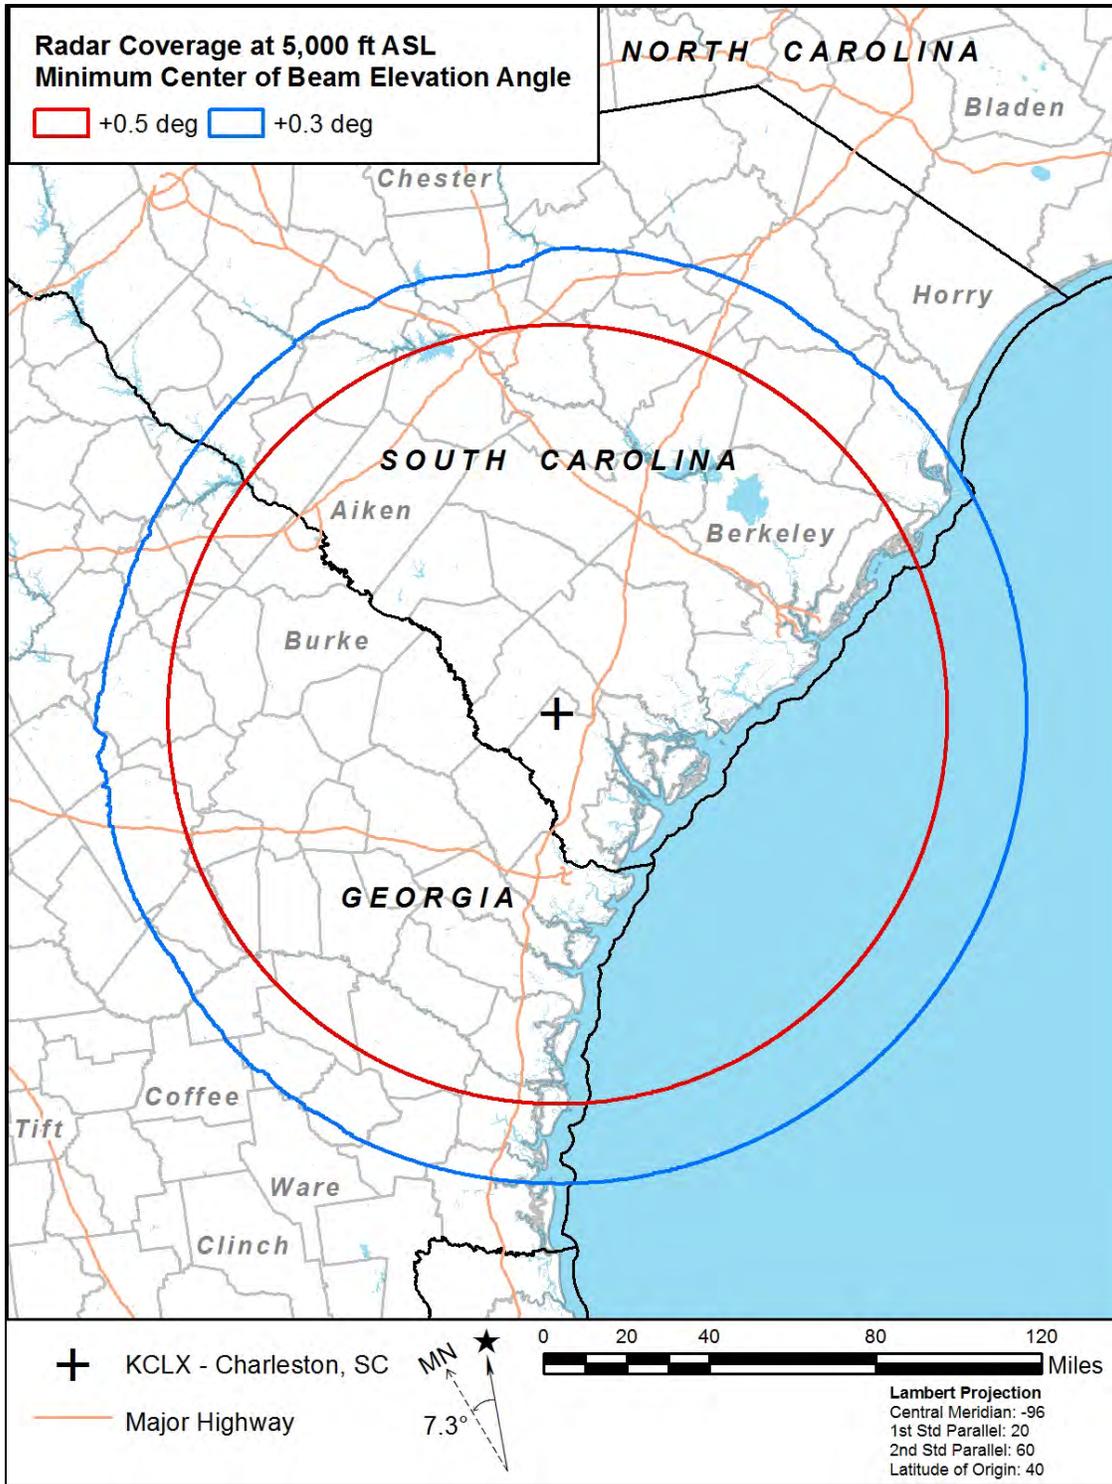


Figure 6: Existing and Proposed KCLX WSR-88D Coverage at 5,000 ft above Site Level



Figure 7: Existing and Proposed KCLX WSR-88D Coverage at 10,000 ft above Site Level

Myrtle Beach, SC, about 140 miles east-northeast of the KCLX WSR-88D, is an area of concern for NWS. The proposed action would reduce the minimum height of radar coverage (i.e. radar coverage floor) over the Myrtle Beach area from 10,000 ft to 7,400 ft AGL. This reduction in coverage height would aid NWS meteorologists by improving their ability to accurately detect and measure low atmosphere weather features and phenomena (e.g. severe rainstorms, tropical storms, tornadoes).

The existing WSR-88D transmitter and antenna are physically equipped to operate at the proposed minimum scan angle. The only change required to implement the proposed change would be modifications to the software that controls radar operations and processes data collected by the radar. No construction activities or ground disturbance would be required to implement the proposed action. The transmit power of the radar would also be unchanged.

### **3.2 ALTERNATIVES**

NAO 216-6A requires analysis of the no-action alternative in EAs. For purposes of this EA report, the no-action alternative is defined as continuing to operate the KCLX WSR-88D serving the Charleston, SC, area with the current minimum center of main beam scan angle of +0.5 deg. This is the same minimum scan angle used by most other WSR-88Ds in the nationwide network. The no-action alternative and alternative minimum scan angles between +0.4 and -0.2 deg are analyzed in Section 5 of this EA.

## 4 ENVIRONMENTAL SETTING, CONSEQUENCES, AND MITIGATION

### 4.1 EXPOSURE OF PERSONS TO RADIOFREQUENCY RADIATION

#### Safety Standards

The electromagnetic environment at a specific location and time is composed of all the electromagnetic fields from various sources (natural and manmade) that arrive there. The electromagnetic spectrum in an area is a continuously usable resource whose dimensions are amplitude, time, frequency, and space. In areas large enough to permit adequate spatial separation of users, the electromagnetic spectrum can simultaneously accommodate many users if they are sufficiently separated in frequency. The electromagnetic environment at any point can change nearly instantaneously and will vary spatially, even at locations in close proximity; therefore, it is convenient to measure and characterize electromagnetic phenomena using averages over time and space.

Manmade contributions to the electromagnetic environment are both intentional and unintentional. Radio and television broadcasts, cellular telephone transmissions, and radar signals are examples of intentional contributions. Electromagnetic noise generated by power lines, fluorescent lights, and motors of all sorts are examples of unintentional human contributions. The KCLX WSR-88D transmits a radio signal at a frequency of 2,810 MHz, which is within the radiofrequency (RF) or microwave portion of the electromagnetic spectrum. Although microwaves can add heat to objects, they do not contain enough energy to remove electrons from biological tissue, and are a form of non-ionizing radiation. In this regard, microwaves are fundamentally different from ionizing radiations (e.g., X-rays, ultraviolet rays) which occur at higher frequency portions of the electromagnetic spectrum. Ionizing radiation occurs only at frequencies greater than  $10^9$  MHz. RF or microwave fields are non-ionizing radiation. Due to the fundamental differences between ionizing and non-ionizing radiation, safety standards and guidelines vary greatly for the two types of electromagnetic radiation. In this section only standards for non-ionizing radiation are addressed because KCLX WSR-88D RF emissions are non-ionizing.

The Institute of Electrical and Electronics Engineers (IEEE) developed safety guidelines for human exposure to RFR, and those standards have been adopted by the American National Standards Institute (ANSI) [ANSI/IEEE, 2006]. The ANSI/IEEE safety standard is designed to protect all persons (including infants, elderly persons, and pregnant women) from adverse health effects from exposure to radiofrequency (RF), even if exposure should last over an entire lifetime. These guidelines set safety levels for maximum permissible exposure (MPE) to RF signals, which include a 10- to 50-fold safety margin and are intended to protect all members of the population.

MPEs are specified in power density of the radio signal in milliwatts per square centimeter ( $\text{mW}/\text{cm}^2$ ) and vary with operating frequency. Separate MPEs have been established for exposure of the general public and workers and for time-averaged exposure and peak exposure.

Occupational safety standards are higher than those for the general public because workers are trained in RF safety practices and have greater ability to use that knowledge to protect themselves from potentially harmful RF exposure. The KCLX WSR-88D operating frequency is 2,810 MHz. The IEEE/ANSI safety standards for those frequencies are  $1.0 \text{ mW/cm}^2$  for the general public (averaged over 30 minutes) and  $9.37 \text{ mW/cm}^2$  for workers (averaged over 6 minutes).

The Occupational Health and Safety Administration (OSHA) regulates occupational exposure to RF emissions. The OSH safety standard is similar to the ANSI/IEEE occupational safety standard:  $10.0 \text{ mW/cm}^2$  (averaged over 6 minutes) (OSHA, 2015). Federal Communications Commission (FCC) RF exposure standards for RF exposure of the general public are the same as the ANSI/IEEE:  $1.0 \text{ mW/cm}^2$  averaged over 30 minutes). The FCC RF exposure standard for occupational exposure is somewhat lower than the ANSI/IEEE safety level:  $5.0 \text{ mW/cm}^2$  (averaged over 6 minutes).

### **RF Exposure Levels**

The KCLX WSR-88D is mounted on a 30 m tall steel-lattice tower. Ground elevation is 115 ft MSL. The center of the antenna is at 228 ft MSL and the lower edge of the antenna is at 214 ft MSL, which is 99 ft above ground level (AGL). When operating at the current minimum scan angle of +0.5 deg, the lower edge of the beam is at 0.0 deg (i.e. horizontal) and the radar's main beam does not impinge on the ground surface or any structures in proximity to the radar. Operating at the proposed minimum scan angle of +0.3 deg would not change that situation; the main beam would still not impinge on the ground surface or structures within 3 miles of the WSR-88D.

Compared to the existing minimum scan angle of +0.5 deg, lowering the minimum scan angle to +0.3 deg would result in a slight increase in RF exposure levels at air space in the vicinity of the radar. Appendix A includes calculations of the existing time-averaged RF exposure levels in the vicinity of the KCLX WSR-88D, and the RF exposure that would result if NWS lowers the minimum scan angle to +0.3 deg. Table 3 summarizes the results from Appendix A. During normal operation of the WSR-88D with a rotating antenna, RF exposure levels at all locations would comply with safety standards for exposure of both workers (i.e. occupational exposure) and the general public.

During infrequent stationary antenna operation, RF exposure levels within the WSR-88D main beam would exceed ANSI/IEEE and FCC safety levels for exposure of the general within 1,740 ft of the WSR-88D antenna. FCC occupational safety levels would be exceeded within 780 ft and ANSI/IEEE occupational safety levels within 568 ft. The KCLX WSR-88D operating at +0.3 deg would not impinge on the ground surface or any structures within those distance and risks to human health would not result.

**Table 3: RF Power Density within KCLX WSR-88D Main Beam  
Compared to ANSI/IEEE Safety Standards**

Distance from Radar	Time-Averaged Power Density (mW/cm <sup>2</sup> )	ANSI/IEEE General Public RF Safety Standard		ANSI/IEEE Occupational RF Safety Standard	
		Safety Standard (mW/cm <sup>2</sup> )	Factor Below Std	Safety Standard (mW/cm <sup>2</sup> )	Factor Below Std
20 ft*	0.603	1.0	1.65	9.37	15.5
900 ft	0.0100	1.0	100	9.37	937
1 mile	0.00029	1.0	3,450	9.37	32,300
5 miles	0.000013	1.0	76,900	9.37	721,000

\*surface of WSR-88D radome

### **RF Electro-stimulation**

The ANSI/IEEE safety guidelines also cover possible induction of currents within the bodies of persons and the potential for electro-stimulation of persons who make contact with conductive objects in the RFR field. The result is potentially harmful sensation of shock and/or burn. These effects only occur for RF fields at frequencies below 110 MHz (ANSI/IEEE, 2006). The KCLX WSR-88D would continue to operate at 2,810 MHz, outside the frequency range where induced currents or electro-simulation occur, and would not cause these effects.

### **Cumulative RF Exposure**

As shown in Table 3, the power density of RF transmissions decreases exponentially with distance from the antenna. At all locations in the vicinity, RF emitted by the WSR-88D during normal operation would be at substantially below the safety standard for RF exposure of the general public. It is improbable that radio emissions from an external source would add to the WSR-88D RF emissions during normal operation to cause cumulative RF exposure levels exceeding safety standards.

## **4.2 RF EXPOSURE OF EQUIPMENT AND ACTIVITIES**

### **4.2.1 Television, Radio, Cellular Telephone, and Personal Communications Devices (PCDs)**

High-power radar, such as the WSR-88D, can interfere with operation of radio, television, cellular telephone, and PCDs in close vicinity to the radar antenna. However, these devices operate at different frequencies from the WSR-88D, reducing the potential for radio interference.

NTIA regulations reserve the 2,700 to 3,000 MHz band for government radiolocation users (e.g., meteorological and aircraft surveillance radars) [NTIA, 2009]. The WSR-88D operates outside the frequencies used by television and radio broadcasts, cellular telephones, and personal communication devices. NWS has not received any reports of the KCLX WSR-88D interfering with operation of other radio uses (Schultz, 2018). Lowering the minimum scan angle to +0.3 deg would not result in the main beam impinging on the ground surface within 3 miles of the radar and the potential for radio interference would be low. No mitigation is necessary.

#### 4.2.2 Electro-explosive Devices (EEDs)

Electro-explosive devices are used to detonate explosives, separate missiles from aircraft, and propel ejection seats from aircraft. Under extreme circumstances, electromagnetic radiation can cause unintended firing of EEDs. Calculations based on a U.S. Air Force (USAF) standard indicate that using electric blasting caps at distances beyond approximately 900 ft from the WSR-88D is a safe practice, even in the main beam of the radar, where the power density of the WSR-88D radio signal is greatest [USAF, 1982]. The U.S. Navy Hazards of Electromagnetic Radiation to Ordnance (HERO) regulations classify ordnance as safe, susceptible, or unsafe and unreliable, based on compliance with MIL-STD 664 (series). HERO safe ordnance is considered safe in all RFR environments. HERO susceptible ordnance may be detonated by RF energy under certain circumstances. HERO unsafe or unreliable ordnance has not been evaluated for compliance with MILSTD 664 or is being assembled, disassembled, or subject to unauthorized conditions, which can increase its sensitivity to RF emissions. Safe separation distances vary for susceptible and unsafe or unreliable ordnance [Naval Sea Systems Command, 2008]. For HERO susceptible ordnance, the safe separation distance (D) in ft is calculated as follows:

$$D = (781) (f)^{-1}(\text{average power} \times \text{antenna gain})^{1/2}$$

Where f is operating frequency in MHz and average power = maximum transmitted power × duty cycle. Inserting these values gives:

$$D = (781) (2,810)^{-1} (475,000 \text{ W} \times 0.0021 \times 35,500)^{1/2} \text{ ft}$$

$$D = 1,654 \text{ ft}$$

For HERO unsafe or unreliable ordnance, the safe separation distance (D) in ft is calculated as follows:

$$D = (2,873) (f)^{-1}(\text{average power} \times \text{antenna gain})^{1/2}$$

$$D = (2,873) (2,810)^{-1} (475,000 \text{ W} \times 0.0021 \times 35,500)^{1/2} \text{ ft}$$

$$D = 6,084 \text{ ft}$$

HERO concerns are only applicable in locations illuminated by the main beam of the radar. When operating at a minimum scan angle of +0.3 deg, the KCLX WSR-88D main beam would not illuminate the ground within either 1,654 or 6,084 ft of the radar. The WSR-88D would not be a hazard to EEDs use in the vicinity. No mitigation is necessary.

#### 4.2.4 Fuel Handling

Electromagnetic fields can induce currents in conductive materials and those currents can generate sparks when contacts between conductive materials are made or broken. Sparks can ignite liquid fuels, such as gasoline. This phenomenon is rare, but can result in hazards to human health and property. This potential hazard arises during the transfer of fuel from container to another (e.g., fueling an automobile, boat, or airplane). The U.S. Navy developed a Technical Manual identifying the circumstances where this hazard may occur and providing direction on how to prevent it. The Technical Manual identifies a safe standoff distance based on radar operating characteristics [Naval Sea Systems Command, 2003]. Using formula contained in the Technical Manual, the distance from the WSR-88D at which RFR hazards to fuel may occur is 537 ft. This hazard only exists in areas directly illuminated by the main beam. The WSR-88D main beam operating at a minimum center of antenna scan angle of +0.3 deg would not illuminate the ground or any structures within 537 ft of the radar. The existing fuel tank for the standby generator at the base of the WSR-88D tower would not be illuminated by the WSR-88D main beam and hazards to fuel handling activities would not result. No mitigation is required.

#### 4.2.5 Active Implantable Medical Devices

ANSI and the Association for Advancement of Medical Instrumentation (AAMI) developed the PC69:2007 standard to prevent external electromagnetic sources from causing electromagnetic interference with active implantable medical devices, including cardiac pacemakers and implantable cardiac defibrillators [ANSI/AAMI, 2007]. This standard specifies that cardiac pacemakers and ICDs must be tested by exposing them to a specified magnetic field and that the device must operate without malfunction or harm to the device. The specified field strength varies with frequency. For the WSR-88D operating frequency of 2,855 MHz, the field strength is 3 A/m. This is converted to power density (S) in units of W/m<sup>2</sup> by assuming free air impedance of 377 ohms:

$$S = 377 |I|^2 \text{ W/m}^2$$

$$S = 3,393 \text{ W/m}^2$$

To convert to mW/cm<sup>2</sup>, we multiply the numerator by 1,000 mW/W and the divisor by 10,000 cm<sup>2</sup>/m<sup>2</sup> which gives a value of 339.3 mW/cm<sup>2</sup>. The peak pulse power of the WSR-88D is given by the following formula (see Appendix A):

$$U_1 = 1.44 \times 10^9 / R^2 \text{ mW/cm}^2$$

Inserting R = 2,060 ft gives a value of 339.3 mW/cm<sup>2</sup>, which equals the threshold established by PC69:2007 standard. At distances of 2,060 ft or greater, the main beam of the WSR-88D would not adversely affect implantable medical devices. There would also be no hazards to implantable medical devices at locations outside the main beam. Operating at the minimum potential center of beam scan angle of +0.3 deg, the main beam of the KCLX WSR-88D would not illuminate the ground or structures within 2,060 ft of the radar and no hazards would result to persons with implanted devices.

Theoretically, persons in aircraft flying within 2,060 ft of the radar could be exposed to RF levels above the device susceptibility threshold set by ANSI/AAMI, but the likelihood of significant harm is extremely low. For persons in aircraft, the airframe would attenuate the RF level and the duration of exposure would be far less than the averaging time (6 to 30 minutes) specified in the RF safety standards, reducing the amount of RF exposure. Additionally, device susceptibility threshold in the PC69:2007 standard is based on coupling of the RFR directly into the device leads (which is the test protocol); the WSR-88D signal would be incident upon the surface of the body and would decrease considerably in strength at the location of the device leads within the body. Third, even in the unlikely event that the WSR-88D RFR couples into the device at levels above the susceptibility threshold, the device would revert to safe mode of operation that would prevent significant harm to the wearer or damage to the device [ANSI/AAMI, 2007].

FCC regulations at 47 CFR Part 95.1221 require that MedRadio medical implant devices and medical body-worn transmitters be able to withstand exposure to RF at the MPEs specified in FCC regulations at 47 CFR 1.1310 (FCC, 2017). As described in Section 4.1 above, RF exposure levels in the vicinity of the KCLX WSR-88D would comply with the FCC safety standards. Exposure of persons wearing implantable medical devices to the KCLX WSR-88D radio emissions would not result in adverse effects.

#### 4.2.6 Astronomical Observatories

The WSR-88D can cause harmful electromagnetic interference (EMI) with charge-couple devices (CCDs) which electronically record data collected by astronomical telescopes (NEXRAD JSPO 1993). The potential for harmful EMI would arise if the WSR-88D’s main beam would directly impinge on an astronomical observatory during low angle scanning. Table 4 lists two astronomical observatories located within 150 miles of the KCLX WSR-88D. The elevation of the KCLX WSR-88D main beam at each observatory was calculated based on a minimum center of beam scan angle of +0.3 deg (i.e. lower half-power point of -0.2 deg) and factors in earth curvature, beam spreading, and terrain blockage. Lowering the minimum scan angle of the WSR-88D to +0.3 deg would not result in the main beam impinging on either of the two observatories. No adverse effects on astronomical observatories would result.

<b>TABLE 4: ASTRONOMICAL OBSERVATORIES WITHIN 150 MILES OF THE KCLX WSR-88D</b>			
<b>Observatory</b>	<b>Location</b>	<b>Distance and Direction</b>	<b>Would WSR-88D Main Beam at +0.3 deg Impinge?</b>
Melton Memorial	Columbia, SC	93 mi north	No
Francis Marion	Florence, SC	133 mi northeast	No

**Summary of RF Exposure Effects**

Table 5 summarizes impacts to potentially RF-sensitive equipment and activities. The potential for the proposed action to cause radio interference with other radio users would be very low.

<b>Table 5: RF Effects of KCLX WSR-88D on Equipment and Activities</b>				
<b>Equipment / Activity</b>	<b>Applicable Standard</b>	<b>Setback Distance</b>	<b>Would Main Beam Impinge on Ground Within Setback Distance?</b>	<b>Potential for Significant Effects</b>
Television, Radio, and Cellular Telephone, and Personal Communications Devices (PCDs)	NTIA Frequency Allocations	n/a	n/a	Very Low
EEDs	U.S. Navy HERO	6,084 ft	No	Very Low
Fuel Handling	U.S. Navy Hazards to Personnel, Fuel, and Other Flammable Material	537	No	Very Low
Active Implantable Medical Devices	AAMI PC69:2007, FCC 47 CFR Part 95.1221	2,060	No	Very Low
Astronomical Observatories	Exposure to WSR-88D Main Beam	n/a	n/a	Very Low

**4.3 LAND USE AND COASTAL ZONE MANAGEMENT**

South Carolina is a coastal state with a Coastal Zone Management Program administered by the South Carolina Department of Health and Environmental Control. The KCLX WSR-88D is located in the coastal management zone (NOAA Office of Coastal Management, 2018). The proposed action would not impact natural resources, generate air or water pollutants, or affect visual quality of the area. The proposed action would not adversely affect the coastal management zone.

The KCLX WSR-88D is located at in a rural forested portion of Jasper County. Land uses in the vicinity consist primarily of woodlots with widely spaced rural residences. The nearest structures are rural residences located 450 ft southeast and 800 ft west of the WSR-88D. The proposed action would not change land uses at the KCLX WSR-88D site or vicinity and would not adversely affect nearby land uses.

#### **4.4 GEOLOGY, SOILS, AND SEISMIC HAZARDS**

KCLX WSR-88D site is situated on an elevated marine terrace. Soil is Chipley fine sand on 0 to 2% slope. Chipley soil is somewhat poorly drained and has a water table at 24 to 36 inches of depth. This soil is not hydric and is not classified as prime farmland. (Soil Survey Staff, Natural Resources Conservation Service, U.S. Department of Agriculture, 2019).

The risk of an earthquake is low. U.S. Geological Survey (USGS) estimates the potential for an earthquake strong enough to cause minor damage or greater at less than 1% per year (USGS, 2019).

Lowering the minimum scan angle of the KCLX WSR-88D would not require physical changes to the radar or result in ground disturbance. The proposed action would have no effect on geology, soils, farmland, or seismicity. No mitigation measures are required.

#### **4.5 DRAINAGE AND WATER QUALITY**

The KCLX WSR-88D site drains westward into Beaverdam Branch, which flows south and eastward into Cypress Creek and the Coosawatchie River. The Coosawatchie River flows southward into Broad River and Port Royal Sound, which connects to the Atlantic Ocean near Hilton Head Island, SC (USGS, 1966 and 2017). Lowering the minimum scan angle of the KCLX WSR-88D would not result in ground disturbance. The proposed action would not affect the amount of impervious surface area at the radar site, the rate of storm runoff flowing from the site during or after precipitation events, or generate water pollutants. The proposed action would have no effect on drainage or water quality. No mitigation measures are required.

#### **4.6 TRANSPORTATION**

The KCLX WSR-88D is accessed via Beaverdam Road, a two-lane paved public road, which connects to U.S. Highway 278 about 2.5 miles southeast of the WSR-88D. The proposed action requires modification of the WSR-88D software to be able to scan at angles below +0.5 deg. To implement the change in scan angle, NWS technicians and engineers would travel to the KCLX WSR-88D site to perform initial testing and ensure that the modified software is operating properly. Travel to the site would be minimal and would not result in significant congestion on local roads. Transportation effects would not be significant. No mitigation measures are required.

#### **4.7 AIR QUALITY**

The KCLX WSR-88D is equipped with a standby generator that is used if primary power is interrupted and also periodically for testing. The proposed action would not change the power consumption of the WSR-88D or affect the hours of operation of the standby generator, and no change in air emissions would result. A Clean Air Act Federal Conformity Determination is not required. No mitigation measures are required.

#### **4.8 FLOOD HAZARDS**

Executive Order (E.O.) 11988, *Floodplain Management*, requires the Federal Government to avoid adverse impacts to the 100-year or base floodplain (that is, the area subject to a 1 percent annual chance of flooding), unless there is no practicable alternative [President, 1977a]. The KCLX WSR-88D site is mapped by the Federal Emergency Management Agency in Zone C, an area of minimal flood hazards (FEMA, 1986). The proposed action of lowering the minimum scan angle of the KCLX WSR-88D to +0.3 deg would not affect floodplains or flood hazards. No mitigation measures are required.

#### **4.9 WETLANDS**

E.O. 11990, *Protection of Wetlands*, requires the Federal Government avoid funding or implementing projects which would adversely impact wetlands unless there is no practicable alternative [President, 1977b]. Based on National Wetland Inventory maps prepared by the U.S. Fish and Wildlife Service (USFWS), the WSR-88D site does not contain federal jurisdictional wetlands. The nearest wetlands are palustrine forested wetlands (PFO1C) located 550 ft northwest of the WSR-88D site. The proposed action would not involve ground disturbance and would not affect federal jurisdictional wetlands; no mitigation is required.

#### **4.10 BIOLOGICAL RESOURCES / PROTECTED SPECIES**

The USFWS administers the Endangered Species Act (ESA) and Migratory Bird Treaty Act. The KCLX WSR-88D is located within the area served by the USFWS South Carolina Ecological Services Field Office Columbia, SC and a protected species list was obtained from that office (see Attachment B). Table 6 lists threatened and endangered species listed under the ESA that could potentially occur in Jasper County, SC.

The protected species list includes five ocean-dwelling species (manatee and four species of sea turtles). The KCLX WSR-88D site is located about 18 miles from the head of Port Royal Sound and about 38 miles from the Atlantic Ocean shoreline. The proposed action would not affect these species or their habitat.

Eastern black rail is one of four black rail subspecies. It inhabits coastal wetlands areas and nests in freshwater marshes with dense herbaceous vegetation. It is not found in wooded areas. (USFWS, 2018).

Kirtland's warbler is songbird that nests in the upper midwest and migrates through the southeastern coast of the U.S. to wintering grounds in the Bahamas. USFWS has proposed removing Kirtland's warbler from the list of endangered and threatened wildlife due to its recovery (USFWS, 2019a).

Atlantic Coast piping plover breeds on coastal beaches Newfoundland to North Carolina and winters along the Atlantic Coast from North Carolina to the Gulf of Mexico. They nest above the high tide line on coastal beaches, sandflats, foredunes, blowout areas behind dunes, washout areas between dunes (USFWS, 2019b).

<b>Table 6: Endangered and Threatened Species Potentially Occurring Near the WSR-88D</b>			
<b>Species (scientific name)</b>	<b>Type</b>	<b>Status</b>	<b>Is WSR-88D site in Critical Habitat?</b>
West Indian manatee ( <i>Trichechus manatus</i> )	Mammal	Threatened	No
Eastern black rail ( <i>laterallus jamaicensis ssp. jamaicensis</i> )	Bird	Proposed Threatened	None designated
Kirtland's warbler ( <i>Setophaga kirtlandii</i> )	Bird	Endangered	None designated
Piping plover ( <i>Charadius melodus</i> )	Bird	Threatened	No
Red-cockaded woodpecker ( <i>Picoides borealis</i> )	Bird	Endangered	None designated
Wood stork ( <i>Mycteria americana</i> )	Bird	Threatened	None designated
Green sea turtle ( <i>Chelonian mydas</i> )	Reptile	Threatened	None designated
Kemp's Ridley sea turtle ( <i>Lepidochelys kempii</i> )	Reptile	Endangered	No
Leatherback sea turtle ( <i>Dermochelys coriacea</i> )	Reptile	Endangered	No
Loggerhead sea turtle ( <i>Caretta caretta</i> )	Reptile	Threatened	No
Frosted flatwoods salamander ( <i>Ambystoma cingulatum</i> )	Amphibian	Threatened	No
American chaffseed ( <i>Schwalbea americana</i> )	Plant	Endangered	None designated
Canby's dropwort ( <i>Oxyopolis canbyi</i> )	Plant	Endangered	None designated
Pondberry ( <i>Lindera melissifolia</i> )	Plant	Endangered	None designated

Red cockaded woodpecker is rather small black and white woodpecker that primarily inhabits longleaf pine forest in the mid-Atlantic and southeastern states. It depends on the ability of pine trees to exude resin which creates an effective barrier against snakes. Loss of habitat due to fire, hardwood tree encroachment, lack of mature trees and habitat fragmentation is believed to be a major factor in the species decline (USFWS, 2019c).

Wood storks are large long-legged wading birds with breeding range extending from southeastern U.S. to South America. They nest in coastal and freshwater swamps with large expanses of open water and feed on fish (USFWS, 2019d).

Frosted flatwoods salamanders are medium-sized salamanders inhabiting longleaf pine flatwoods and savannas with wiregrass. They lay eggs in temporary wetland depressions, which are critical to their survival (USFWS, 2019e).

American chaffseed is an erect herb that reaches up to 31 inches in height. It grows on sandy, acidic, seasonally moist to dry soil in open moist pine flatwoods. It is shade intolerant and requires open woods (USFWS, 2019f).

Canby's dropwort is a flowering plant that inhabits swamps, shallow pineland ponds, and wet pine savannas. Destruction of wetlands due to human development is the primary threat to the species (USFWS, 2019g).

Pondberry is a deciduous shrub growing up to 6 ft in height. It inhabits poorly drained depressions at the margins of limestone sinks. Loss of habitat due to land clearing and drainage is the primary threat to this species (USFWS, 2019h).

The WSR-88D and nearby areas do not contain suitable habitat for manatees, sea turtles, Eastern black rail, piping plover, wood storks, American chaffseed, or pondberry. Although pine forest in the vicinity of the WSR-88D could potentially include habitat suitable for Kirtland's warbler, red-cockaded woodpeckers, frosted flatwoods salamander, or Canby's dropwort, the site and vicinity do not include designated critical habitat for those species or any of the 14 listed species. The proposed action would not include construction activities and would not result in ground disturbance or vegetation removal. No physical changes to suitable habitat for any of the listed species would result. Lowering the minimum scan angle to +0.3 deg from the current +0.5 deg would result in a thin sliver of the atmosphere, which is currently below the main beam coverage area, being exposed to the main beam of the WSR-88D (see Figure 4). The portion of this atmosphere above the newly exposed sliver of atmosphere is currently within the main beam and RF exposure levels would not change. The sliver of the atmosphere where new main beam coverage would result in increased RF exposure levels would be very small in close proximity to the WSR-88D - 3 ft thick at a distance of 900 ft from the WSR-88D and increasing in thickness with distance from the radar. At 1 mile it would be 18 ft thick and at five miles it would be 89 ft thick. Migratory birds or bats flying within the newly covered sliver of the atmosphere would be

exposed to RF emissions from the WSR-88D. The RF levels in the sliver of airspace would be no greater than in RF levels in the existing covered airspace, which occurs just above the newly exposed air space. At a distances of several miles or greater where the volume of newly covered airspace would be substantial, RF levels would be very low. At a distance of 900 ft, RF exposure levels would be 100 times less than safety standards for human exposure. Based on the extremely low RF levels at distance from the WSR-88D, RF exposure of listed migratory birds flying within the newly covered airspace would not be harmful.

Elevated RF exposure could result if birds or bats fly in a path that keeps it within the WSR-88D main beam for extended periods of time. However, during normal operation the WSR-88D main beam is continuously moving. At a distance of 1,000 ft the WSR-88D main beam is moving at an effective speed of about 89 miles per hour and it is very unlikely that a bird or bat could fly within the WSR-88D main beam for any length of time.

The proposed action would not result in significant impacts to protected species, critical habitat, or migratory birds. No mitigation measures are required.

#### **4.11 CULTURAL AND HISTORIC RESOURCES**

Section 106 of the National Historic Preservation Act of 1966 (as amended) requires that federal agencies consider the effects of their actions on historic places and, if effects may result, provide the State Historic Preservation Officer (SHPO) with an opportunity to comment on their actions. Section 106 regulations are set forth in 36 CFR Part 800, *Protection of Historic Properties* (Advisory Council on Historic Preservation, 2010).

Because the proposed action would not involve ground disturbance, no impacts to archaeological or paleontological resources would result. The proposed action's area of potential effect (APE) is defined as area within 1,740 ft of the KCLX WSR-88Ds where RF exposure of persons within the WSR-88D main beam could potentially exceed safety levels (see Table 4). The South Carolina State Historic Preservation Offices website was searched for historic places listed on the National Register of Historic Places (NRHP), above-ground historic and architectural properties, areas surveyed for cultural resources, and archaeological sites in the vicinity of the KCLX WSR-88D. No listings for historic or potentially historic resources were found within the APE (South Carolina Department of Archives and History, 2018). Under Section 106 Regulations 36 CFR Section 800.2 (a)(1), *Protection of Historic Properties*, if the proposed action doesn't have the potential to affect historic properties, NWS "has no further obligations under section 106" and consultation with South Carolina SHPO regarding possible impacts on historic properties is not required [Advisory Council on Historic Preservation, 2010].

#### **4.12 ENVIRONMENTAL JUSTICE AND SOCIOECONOMIC IMPACTS**

E.O. 12898, *Federal Actions to Address Environmental Justice in Minority Populations and Low Income Populations*, requires federal agencies to identify and address, as appropriate, disproportionately high and adverse environmental or human health effects on minority populations and low income populations (President, 1994).

The KCLX WSR-88D is located in a rural portion of Jasper County, SC. The nearest residences are located 450 ft east and 800 ft west of the radar. The proposed action would not generate air or water pollutants or hazardous waste. The project would modify the operation of the KCLX WSR-88D by reducing the minimum scan angle from +0.5 deg to +0.3 deg. The lowered WSR-88D main beam would not impinge on the ground in proximity to the radar and would comply with safety standards for human exposure to RF energy and setbacks for activities (e.g. fuel handling and EED use) that are potentially sensitive to RF exposure. No disproportionately high and adverse effects would result to any persons, including minority or low income populations. No mitigation is required.

#### **4.13 FARMLANDS**

The Farmland Protection Policy Act sets forth federal policies to prevent the unnecessary conversion of agricultural land to non-agricultural use. NRCS regulations at 7 CFR Part 658, *Farmland Protection Policy Act*, are designed to implement those policies. Completion of Form AD-1006 and submission to the U.S. Department of Agriculture (DoA) is required if a federal agency proposes to convert land designated as prime farmland, farmland of statewide importance, or unique farmland to non-agricultural use. Soil at the KCLX WSR-88D site is not classified as prime farmland. Although limited farming and considerable timber production occur in the vicinity of the WSR-88D, the WSR-88D site itself is committed to non-agricultural uses. The proposed action would not convert farmland to non-farm use. No mitigation is necessary.

#### **4.14 ENERGY CONSUMPTION**

The proposed action would not change electric use by the WSR-88D and would have no effect on energy consumption. No mitigation is necessary.

#### **4.15 VISUAL QUALITY/ LIGHT EMISSIONS**

The proposed action would not change the appearance of the KCLX WSR-88D or result in new emissions of visible light. The proposed action would have no effect on visual quality. No mitigation is necessary.

#### **4.16 SOLID AND HAZARDOUS WASTE**

The proposed action would result in no changes to solid or hazardous waste generation. No mitigation is necessary.

#### **4.17 WILD AND SCENIC RIVERS**

The Wild and Scenic Rivers Act of 1968 protects free-flowing rivers of the U.S. These rivers are protected under the Act by prohibiting water resource projects from adversely impacting values of the river: protecting outstanding scenic, geologic, fish and wildlife, historic, cultural, or recreational values; maintaining water quality; and implementing river management plans for

these specific rivers. The wild and scenic river closest to the KCLX WSR-88D is the Chattooga River, located about 195 miles northwest on the South Carolina / Georgia state boundary (National Park Service, 2019). The proposed action would not affect the Chattooga River or any other wild and scenic river. No mitigation is necessary.

## 5 ALTERNATIVES TO THE PROPOSED ACTION

### 5.1 MINIMUM SCAN ANGLES BETWEEN +0.4 AND -0.1 DEG

NWS evaluated the benefits and potential impacts of lowering the minimum center of beam scan angle of the KCLX WSR-88D to each angle between +0.4 and -0.2 deg in 0.1 degree increments (see Appendix B). That analysis found that the proposed action of lowering the minimum scan angle to +0.3 deg would result in the significant feasible improvement in radar coverage area and reduce the height of radar coverage over the Myrtle Beach, SC.

A minimum scan angle of +0.4 would increase the radar's coverage area, but by less than the proposed action (i.e. minimum scan angle of +0.3) deg. Compared to the proposed action, a minimum scan angle of +0.2 deg would slightly increase coverage area at 2,000 ft ASL by 2%, but would not reduce the height of radar coverage over Myrtle Beach, SC. The increase in radar coverage area would be negligible and would be outweighed by increased ground clutter returns.

Lowering the minimum scan angle of the KCLX WSR-88D to +0.1 deg or lower would result in no additional increase in coverage area (see Appendix B). Because a minimum scan angle of +0.3 deg would result in significant improvement in radar coverage area while minimizing ground clutter returns, NWS rejected the alternatives of operating the KCLX WSR-88D at a minimum scan angles of +0.4, +0.2, +0.1, 0.0, -0.1, or -0.2 deg.

### 5.2 NO ACTION

The no action alternative consists of continued operation of the KCLX WSR-88D at the existing minimum scan angle of +0.5 deg. The improvements in radar coverage summarized in Section 3 would not be achieved and the project objectives would not be met.

The proposed action would result in increased RF exposure compared to existing WSR-88D operations as described in section 4.1; the no-action alternative would not change RF exposure levels from existing. Under both the proposed action and the no action alternative, RF exposure during normal WSR-88D operations would conform to safety standards established by ANSI/IEEE, OSHA, and FCC.

Similar to the proposed action, the no-action alternative would not result in adverse effects in the following topic areas:

- Land Use and Coastal Zone Management
- Geology, Soils, and Seismic Hazards
- Drainage and Water Quality
- Transportation
- Air Quality
- Flood Hazards
- Wetlands
- Biological Resources / Protected Species
- Cultural and Historic Resources

- Environmental Justice and Socioeconomic Impacts
- Farmlands
- Energy Consumption
- Visual Quality/ Light Emissions
- Solid and Hazardous Waste
- Wild and Scenic Rivers

## 6 FINDING

The proposed action of lowering the scan angle of the KCLX WSR-88D from the current minimum of +0.5 deg to +0.3 deg would not result in significant changes in the quality of the human environment. Lowering the minimum scan angle would also not add to the environmental effects of past, present, and reasonably foreseeable future actions to cause cumulatively significant effects

The proposed action would improve the quality of meteorological radar data available to NWS forecasters and others users of the data. This may indirectly benefit the residents and businesses of the Charleston, SC, WFO service area (southern South Carolina and eastern Georgia) by improving the accuracy of forecast and severe weather alerts, which could result in environmental benefits if weather dependent economic activities (e.g., agriculture, construction, outdoor recreation, transportation, water management) become more efficient or safer as a result of improved weather services. The resulting environmental benefits are difficult to quantify, but are unlikely to be significant.

Implementation of the proposed action would not have the potential to cause significant changes in the environmental. A Finding of No Significant Impact is warranted for the proposed action.

## **7 DOCUMENT PREPARERS**

This Draft EA was prepared by Sensor Environmental LLC under contract to Centuria Corporation. Centuria Corporation provides support to the NWS Radar Operations Center (ROC) in Norman, OK.

Mr. James Manidakos, CEO, served as Sensor's Project Manager. Alion Science and Technology Corporation prepared radar coverage maps and calculated coverage areas under subcontract to Sensor. Mr. Andre Tarpinian, Radio Frequency Engineer, served as Alion's Project Manager. Ms. Jessica Schultz, NWS Radar Focal Point, and Mr. Edward Ciardi, Program Manager, EVP Weather Systems, from the ROC assisted in preparation of this EA. Mr. Michael Emlaw, Meteorologist-in-Charge, and staff from the Charleston, SC, WFO, also assisted in preparation of this EA.

## 8 REFERENCES

- Advisory Council on Historic Protection. *Protection of Historic Properties*, “Participants in the Section 106 Process.” 36 CFR Section 800.2 (July 1, 2010).
- American Association of Petroleum Geologists. *Geological Highway Map, Southeastern Region, Alabama, Louisiana, Florida, Mississippi, and Georgia* (1975).
- ANSI/AAMI. *American National Standard, Active Implantable Medical Devices – Electromagnetic compatibility – EMC test protocols for cardiac pacemakers and implantable cardioverter defibrillators*, ANSI/AAMI PC69:2007 (2007).
- ANSI/IEEE. *IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz*, IEEE Std. C95.1-2005, (April 19, 2006).
- EPA. *National Primary and Secondary Ambient Air Quality Standards*, 40 CFR Part 50 (2011).
- FCC. Title 47 Code of Federal Regulations Part 1.1310 *Radiofrequency Radiation Exposure Limits* and Part 95.1221 *Medical Device Radiocommunication Service, RF Exposure*, <https://www.law.cornell.edu/cfr/text/47/1.1310> (accessed May 6, 2017).
- FEMA. *Flood Insurance Rate Map, Jasper, South Carolina, Unincorporated Areas, Community Panel Number 450112-0050B* (October 29, 1986).
- National Park Service, National Wild and Scenic Rivers System. <https://www.rivers.gov/>. (accessed March 27, 2019).
- Naval Sea Systems Command. *Technical Manual, Electromagnetic Radiation Hazards (U), (Hazards to Personnel, Fuel, and Other Flammable Material) (U)*, NAVSEA OP 3565/NAVAIR 16-1-529, Volume 1, Sixth Revision (February 1, 2003).
- Naval Sea Systems Command. *Technical Manual, Electromagnetic Radiation Hazards (U), (Hazards to Ordnance) (U)*, NAVSEA OP 3565/NAVAIR 16-1-529, Volume 2, Seventeenth Revision, (September 11, 2008).
- NEXRAD JSPO. *Final Supplemental Environmental Assessment (SEA) of the Effects of Electromagnetic Radiation from the WSR-88D Radar* (April 1993).
- NOAA NAO 216-6A: *Compliance with the National Environmental Policy Act , Executive Orders 12114, Environmental Effects Abroad of Major Federal Actions ; 11988 and 13690, Floodplain Management; and 11990 Protection of Wetlands*. (April 22, 2016).
- NOAA. *Policies and Procedures for Compliance with the National Environmental Policy Act and Related Authorities*. Companion Manual for NOAA Administrative Order 216-6A (January 13, 2017).
- NOAA Office of Costal Management. *Coastal Management Program*. <https://coast.noaa.gov/czm/mystate/> (accessed March 27, 2019).

- NRCS. *Farmland Protection Policy Act*, 9 CFR Part 658 (January 1, 2010).
- NTIA. *Manual of Regulations and Procedures for Federal Radio Frequency Management* (revised September 2009).
- NWS. *Next Generation Weather Radar Programmatic Environmental Impact Statement (PEIS), Report R400-PE201* (1984).
- NWS. *Mission of the NWS*, <http://www.wrh.noaa.gov/psr/general/mission/index.php> (Accessed October 26, 2009).
- President. *Floodplain Management*, Executive Order 11988, 42 *Federal Register* 26951 (May 24, 1977a).
- President. *Protection of Wetlands*, Executive Order 11990, 42 *Federal Register* 26961 (May 24, 1977b).
- President. *Federal Actions to Address Environmental Justice in Minority Populations and Low-income Populations*, Executive Order 12898, 59 *Federal Register* 7629 (February 11, 1994).
- Schultz, Jessica. Radar Focal Point, NWS Radar Operations Center. email to [jmanitakos@sensorenvirollc.com](mailto:jmanitakos@sensorenvirollc.com) (September 13, 2018).
- Soil Survey Staff, NRCS, U.S. Department of Agriculture. *Web Soil Survey*. <https://websoilsurvey.nrcs.usda.gov> (accessed March 27, 2019).
- South Carolina Department of Archives and History, *South Carolina ArchSite*. [www.scarchsite.org/publicview.aspx](http://www.scarchsite.org/publicview.aspx). (accessed March 27, 2019).
- USFWS. *National Wetlands Inventory*. <https://www.fws.gov/wetlands/data/mapper.html> (Accessed March 27, 2019).
- USFWS. *Endangered and Threatened Wildlife and Plants; 12-month Petition Finding and Threatened Species Status for Eastern Black Rail with a Section 4(d) Rule*. *Federal Register*, Vol. 83, No. 195, pg. 50610 et seq. (October 9, 2018).
- USFWS. Species Profile for Kirtland's Warbler. <https://ecos.fws.gov/ecp0/profile/speciesProfile?sId=8078> (accessed March 27, 2019a).
- USFWS. Species Profile for Piping Plover. <https://ecos.fws.gov/ecp0/profile/speciesProfile?sId=6039#status8> (accessed March 27, 2019b).
- USFWS. Species Profile for Red-cockaded Woodpecker. <https://ecos.fws.gov/ecp0/profile/speciesProfile?sId=7614> (accessed March 27, 2019c).

- USFWS. Species Profile for Wood Stork. <https://ecos.fws.gov/ecp0/profile/speciesProfile?sId=8477> (accessed March 27, 2019d).
- USFWS. Species Profile for Frosted Flatwoods Salamander. <https://ecos.fws.gov/ecp0/profile/speciesProfile?sId=49818> (accessed March 27, 2019e).
- USFWS. Species Profile for American Chaffseed. <https://ecos.fws.gov/ecp0/profile/speciesProfile?sId=1286> (accessed March 27, 2019f).
- USFWS. Species Profile for Canby's Dropwort. <https://ecos.fws.gov/ecp0/profile/speciesProfile?sId=7738> (accessed March 27, 2019g).
- USFWS. Species Profile for Pondberry. <https://ecos.fws.gov/ecp0/profile/speciesProfile?sId=1279> (accessed March 27, 2019h).
- USGS. *Grays, South Carolina*. 7.5 Minute Series topographic quadrangle (2017).
- USGS. *Savannah, Georgia; South Carolina*. 1:250,000 topographic map (1966).
- USGS, *Short-term Induced Seismicity Models, 2018 One-year Model*. <https://earthquake.usgs.gov/hazards/induced/index.php#2018> (accessed January 6, 2019).

## 9 EA DISTRIBUTION

Mark S. George  
Environmental Engineer  
Environmental Compliance Division  
NOAA Safety & Environmental Compliance Office  
325 Broadway, Bldg. DSRC  
Boulder, CO 80305-3328  
[mark.george@noaa.gov](mailto:mark.george@noaa.gov)

Matthew M. Kuzemchak  
NWS NEPA Coordinator  
1325 East West Hwy, Bldg. SSMC2  
Silver Spring, MD 20910-3283  
[matthew.kuzemchak@noaa.gov](mailto:matthew.kuzemchak@noaa.gov)

Katherine D. Renshaw  
NOAA NEPA Coordinator  
Office of General Counsel  
1305 East West Highway, Bldg. SSMC4  
Silver Spring, MD 20910-3278  
[katherine.renshaw@noaa.gov](mailto:katherine.renshaw@noaa.gov)

Jessica Schultz, Radar Focal Point  
NOAA NWS Radar Operations Center  
1200 Westheimer Drive  
Norman, OK 73069  
[Jessica.A.Schultz@noaa.gov](mailto:Jessica.A.Schultz@noaa.gov)

Cheryl A. Stephenson  
Branch Chief, Program Branch,  
NWS Radar Operations Center  
1313 Halley Circle, Bldg. 600  
Norman, OK 73069-8480  
[cheryl.a.stephenson@noaa.gov](mailto:cheryl.a.stephenson@noaa.gov)

Andre Tarpinian  
Alion Science and Technology  
306 Sentinel Drive  
Annapolis Junction, MD 20701  
[atarpinian@alionscience.com](mailto:atarpinian@alionscience.com)

USFWS South Carolina Ecological Field Services Office  
176 Croghan spur Road, suite 200  
Charleston, SC 29407  
<http://www.fws.gov/charleston/>

Michael Emlaw, Meteorologist-in-Charge  
NOAA NWS Weather Forecast Office  
5777 South Aviation Avenue  
North Charleston, SC 29406-6162  
[michael.emlaw@noaa.gov](mailto:michael.emlaw@noaa.gov)

South Carolina Department of Archives and History  
8301 Parklane Road  
Columbia, SC 29223  
[EEmerison@scdah.sc.gov](mailto:EEmerison@scdah.sc.gov)

This page intentionally left blank.

**ENVIRONMENTAL ASSESSMENT (EA)**  
**LOWERING THE MINIMUM SCAN ANGLE OF THE WEATHER**  
**SURVEILLANCE RADAR - MODEL 1988, DOPPLER (WSR-88D)**  
**SERVING THE CHARLESTON, SC, AREA**

**APPENDICES**

**APPENDIX A**  
**RADIOFREQUENCY RADIATION POWER DENSITY CALCULATIONS**

## 1. OBJECTIVE

This appendix quantifies the power densities of the radiofrequency radiation (RFR) emitted by the Weather Surveillance Radar, Model 1988 Doppler (WSR-88D) during operations that include minimum scan angles of +0.5 to +0.3 degrees (deg). The calculated power densities will be used to analyze the potential for effects to result from exposure of humans, equipment, and activities to the WSR-88D radio signal, and the significance of any identified potential effects.

## 2. METHODOLOGY

This memorandum builds upon the analysis included in the 1993 *Supplemental Environmental Assessment (SEA) of the Effects of Electromagnetic Radiation from the WSR-88D Radar* [NEXRAD Joint System program Office, 1993]. The 1993 analysis analyzed the potential electromagnetic effects of the WSR-88D signal when the radar operates at a minimum center of beam scan angle of +0.5 deg. This memorandum builds on that analysis by considering operation at a lower minimum scan angle of +0.3 deg. The parameters of the WSR-88D are shown in Table A-1 and are not changed from the 1993 analysis:

<b>Parameter</b>	<b>Value</b>
Operating Frequency	2,810 megahertz (MHz)
Wavelength at WSR-88D center frequency (2,850 MHz)	0.345 ft, 10.5 cm
Maximum pulse power	475 kiloWatts (kW)
Maximum duty cycle	0.21%
Antenna diameter	28 ft, 853 cm
Antenna gain	35,500:1, 45.5 dB
Beam width to half-power points	1.0 deg
First sidelobe relative power density, maximum	0.00325, -25 dB
Other sidelobe maximum power density, relative to main beam	0.0004, -34 dB

The NWS proposes to modify the minimum center of beam scan angle used during operation of the KCLX WSR-88D below the +0.5 angle currently used. This would not require changes to the antenna, other hardware which composes the WSR-88D, or the radiated pulse power of the WSR-88D. However, incorporating scans at angles below +0.5 deg could affect the amount of RFR exposure experienced by persons, equipment, and activities at or near ground level in the vicinity of the radar. This memorandum quantifies that change.

### 3. MODIFIED VOLUME SCAN PATTERN 31

The WSR-88D uses a number of complex volume scan patterns to maximize the quality and usefulness of the meteorological data it collects. The 1993 report analyzed volume scan pattern 31, which results in the highest levels of ground-level RFR exposure. Volume Scan Pattern (VCP) 31 consists of eight 360 deg rotations of the antenna at various scan angles. NWS proposes to add two additional antenna rotations at a scan angle less than +0.5 to this scan pattern to increase the range at which the radar can detect and track meteorological phenomena, especially at low elevations within the atmosphere. This memorandum assumes that the two added scans would be at +0.3 deg (i.e. lower half power point of -0.2 deg), the minimum scan angle selected by NWS for the KCLX WSR-88D. Adding two +0.3 degree scans would result in the greatest possible increase in ground level RFR exposure. The modified VCP 31 would be as follows:

- Two complete rotations at +0.3 deg
- Two complete rotations at +0.5 deg
- Two complete rotations at +1.5 deg
- Two complete rotations at +2.5 deg
- One complete rotation at +3.5 deg
- One complete rotation at +4.5 deg

The complete pattern would include 10 rotations of the antenna at a speed of 0.8 revolutions per minute (rpm), the pattern would take about 12 minutes and 22 seconds to complete [Turner, 2011].

### 4. CALCULATION OF RF POWER DENSITIES

Appendix A of the 1993 SEA includes detailed calculations of the RFR power density and exposure levels resulting from volume scan pattern 31. The proposed scan change would not affect the distance of the transition from the near field to the far field, calculated at 640 to 800 ft in section A.3 of the 1993 Appendix A.

#### 4.1 Far Field

The values of  $U_1$ ,  $U_2$ , and  $U_3$  would be unchanged from the values derived in 1993 Appendix A. The maximum pulse power density within the main beam ( $U_1$ ) is given by the formula:

$$U_1 = 1.44 \times 10^9 / R^2 \text{ milliWatts per square centimeter (mW/cm}^2\text{)}$$

where R is the distance from the antenna in ft. The maximum pulse power density at locations greater than 6 deg off the main beam axis (i.e. outside the area illuminated by the main beam and first five sidelobes) is  $U_2$  (unchanged from 1993 Appendix A), given below:

$$U_2 = 5.76 \times 10^5 / R^2 \text{ mW/cm}^2$$

The RF human exposure standards are based on time-averaged RF exposure for six minutes (occupational exposure) or 30 minutes (general public exposure) [American National Standards Institute/Institute of Electrical and Electronic Engineers, 2005]. We use six minutes as the averaging time as a worst-case analysis. The time-averaged power density for the main beam rotating continuously at +0.5 deg, considering the contributions from both the main beam and the first five sidelobes is given by  $U_3$  (unchanged from 1993 Appendix A), below:

$$U_3 = 1.35 \times 10^4 / R^2 \text{ mW/cm}^2$$

At this point the analysis must consider the proposed modifications to VCP 31. The modified VCP 31 would have two additional +0.3 deg scans. Within our six minute averaging time, these two added scans would replace the RFR contribution from one +1.5 deg and one +2.5 deg scan. As described in the 1993 appendix,  $U_4$  sums the RFR contributions at center of antenna level from each of the scans performed during the six minute period of interest. The coefficients for the +0.3 deg scans are 2.4/6 reflecting the proportion of the 6 minutes and 1.0 because the center of beam will essentially be at antenna level (i.e. +0.3 deg which equates to 4.2 ft, or one-seventh of the beam width at the far field transition distance of 800 ft). The corresponding coefficients for the two + 0.5 deg scans within the six minutes are 2.4/6 and 0.5, and for the one +1.5 deg scan within the six minutes are 1.2/6 and 0.012. The modified  $U_4$  calculation is given below

$$U_4 = [(2.4/6) (1.0) + (2.4/6) (0.5) + (1.2/6) (0.012)] U_3$$

$$U_4 = (0.6024)U_3$$

Inserting the  $U_3$  value of  $1.35 \times 10^4 / R^2$  milliwatts/cm<sup>2</sup> (mw/ cm<sup>2</sup>), yields:

$$U_4 = 8.132 \times 10^3 / R^2 \text{ mW/cm}^2$$

$U_4$  is the 6-minute time-averaged power density at locations in the far field directly illuminated by the main beam and at the same elevation as the WSR-88D antenna, considering the RFR contributed from the main beam and the first five sidelobes. According to the WSR-88D specification, sidelobes of higher order than the first five will contain less than 5% of the radiated energy. The 1993 SEA calculated the average power density of these higher order sidelobes at  $4/R^2$  mW/cm<sup>2</sup>. We add this to  $U_4$  to obtain  $U_5$ , the total time-averaged power density at an elevation even with the center of antenna elevation and distances greater than 800 ft from the antenna:

$$U_5 = 8.13 \times 10^3 / R^2 + 4/R^2 = 8.136 \times 10^3 / R^2 \text{ mW/cm}^2$$

#### 4.2 Near Field

Appendix A of the 1993 SEA calculates the height Y of the mathematical cylinder illuminated by all scans during the six-minute period using the formula  $Y = 28 \div R \tan 2 \text{ deg} + 0.035R$ .

Since the modified scan pattern of interest includes scans of +0.3, +0.5, and +1.5 degs, the angular range is 1.2 deg, and we recalculate Y as follows:

$$Y = 28 + R \times \tan(1.2 \text{ deg}) = 28 + 0.021R$$

The circumference of the illumination cylinder is  $2\pi RY$  and the total area A is:

$$A = 2\pi RY = 176R + 0.13R^2$$

The average power radiated is less than or equal to 1 kW, and the average power over the cylindrical surface cannot exceed this value divided by the area. At the mid-height of the cylinder, the local power density will exceed the average value by a factor of 2 (unchanged from the 1993 analysis). We introduce this factor, multiply by  $10^6$  to convert from kW to mW, and divide by 929 to convert from sq ft to square centimeters (sq cm):

$$U_6 = 2 * 10^6 / (929) (176R + 0.13R^2) = 16,560 / (R^2 + 1,354R) \text{ mW/cm}^2$$

$U_6$  is the time-averaged RFR exposure within the area illuminated by the WSR-88D main beam up to distances of 640 ft where the beam begins to spread.

#### 4.3 Combined Result and RF Exposure Levels near KCLX WSR-88D

Table A-2 shows the time-averaged RFR power densities that would result at locations directly illuminated by the main beam of the KCLX WSR-88D when operating in modified VCP 31. The near field is within 640 ft of the radar and the  $U_6$  formula is used to calculate these near field values. At greater distances, the far field formula for  $U_5$  is used. For comparison purposes, corresponding values for the original VCP 31 are also shown. As can be seen from Table A-2, use of modified scan pattern 31 would lower the elevation at which the lower half-power point (i.e. bottom edge) of the main beam occurs and would also slightly increase the time-averaged power densities in both the near and far fields.

<b>Table A-2: Comparison of Time-Average RFR Power Densities at Various Distances within the KCLX WSR-88D Main Beam</b>				
<b>Distance (ft)</b>	<b>Distance (mi)</b>	<b>Elevation Change of Lower Half-Power Point (ft)</b>	<b>Original VCP 31 Time-Avg Power Density (mW/cm<sup>2</sup>)</b>	<b>Modified VCP 31 Time-Avg Power Density (mW/cm<sup>2</sup>)</b>
20*	0.004	No change	0.598	0.603
900	0.17	-3	0.0072	0.0100
5,280	1	-18	0.00021	0.00029
25,400	5	-89	0.000009	0.000013

\*surface of WSR-88D radome

NWS may infrequently operate the KCLX WSR-88D with a stationary antenna, resulting in the main beam being continuously pointed at the same location for a period of time. The RF exposure level within the main beam can be calculated using equation  $U_1$  multiplied by the radar duty cycle

$$U_7 = (1.44 \times 10^9 / R^2) 0.0021 = 3.024 \times 10^6 / R^2 \quad (\text{mW/cm}^2)$$

When operating in stationary antenna mode, the KCLX WSR-88D would exceed the ANSI/IEEE safety levels within the following distances:

ANSI/IEEE and FCC General Public Safety Level (1.0 mW/cm<sup>2</sup>): 1,740 ft

FCC Occupational Safety Level (5.0 mW/cm<sup>2</sup>): 780 ft

ANSI/IEEE Occupational Safety Level (9.37 mW/cm<sup>2</sup>): 568 ft

## 5. REFERENCES

American National Standards Institute / Institute of Electrical and Electronic Engineers (ANSI/IEEE). *IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz*. IEEE Std C95.1-2005 (April 19, 2006).

Next Generation Weather Radar Joint System Program Office (JSPO), *Final Supplemental Environmental Assessment (SEA) of the Effects of Electromagnetic Radiation from the WSR-88D Radar* (April 1993).

Edward Ciardi, Program Manager, EVP Weather Systems, Centuria Corporation. email to James Manidakos, Sensor Environmental LLC, (September 13, 2018).

**APPENDIX B**

**PROTECTED SPECIES LIST**



# United States Department of the Interior



## FISH AND WILDLIFE SERVICE

South Carolina Ecological Services  
176 Croghan Spur Road, Suite 200  
Charleston, SC 29407-7558  
Phone: (843) 727-4707 Fax: (843) 727-4218  
<http://www.fws.gov/charleston/>

In Reply Refer To:

March 26, 2019

Consultation Code: 04ES1000-2019-SLI-0376

Event Code: 04ES1000-2019-E-00744

Project Name: KCLX WSR-88D Lower Scan Angle

Subject: List of threatened and endangered species that may occur in your proposed project location, and/or may be affected by your proposed project

To Whom It May Concern:

The enclosed species list identifies threatened, endangered, proposed and candidate species, as well as proposed and final designated critical habitat, that may occur within the boundary of your proposed project and/or may be affected by your proposed project. The species list fulfills the requirements of the U.S. Fish and Wildlife Service (Service) under section 7(c) of the Endangered Species Act (Act) of 1973, as amended (16 U.S.C. 1531 *et seq.*).

New information based on updated surveys, changes in the abundance and distribution of species, changed habitat conditions, or other factors could change this list. Please feel free to contact us if you need more current information or assistance regarding the potential impacts to federally proposed, listed, and candidate species and federally designated and proposed critical habitat. Please note that under 50 CFR 402.12(e) of the regulations implementing section 7 of the Act, the accuracy of this species list should be verified after 90 days. This verification can be completed formally or informally as desired. The Service recommends that verification be completed by visiting the ECOS-IPaC website at regular intervals during project planning and implementation for updates to species lists and information. An updated list may be requested through the ECOS-IPaC system by completing the same process used to receive the enclosed list.

The purpose of the Act is to provide a means whereby threatened and endangered species and the ecosystems upon which they depend may be conserved. Under sections 7(a)(1) and 7(a)(2) of the Act and its implementing regulations (50 CFR 402 *et seq.*), Federal agencies are required to utilize their authorities to carry out programs for the conservation of threatened and endangered species and to determine whether projects may affect threatened and endangered species and/or designated critical habitat.

A Biological Assessment is required for construction projects (or other undertakings having similar physical impacts) that are major Federal actions significantly affecting the quality of the human environment as defined in the National Environmental Policy Act (42 U.S.C. 4332(2)(c)). For projects other than major construction activities, the Service suggests that a biological evaluation similar to a Biological Assessment be prepared to determine whether the project may affect listed or proposed species and/or designated or proposed critical habitat. Recommended contents of a Biological Assessment are described at 50 CFR 402.12.

If a Federal agency determines, based on the Biological Assessment or biological evaluation, that listed species and/or designated critical habitat may be affected by the proposed project, the agency is required to consult with the Service pursuant to 50 CFR 402. In addition, the Service recommends that candidate species, proposed species and proposed critical habitat be addressed within the consultation. More information on the regulations and procedures for section 7 consultation, including the role of permit or license applicants, can be found in the "Endangered Species Consultation Handbook" at:

<http://www.fws.gov/endangered/esa-library/pdf/TOC-GLOS.PDF>

Please be aware that bald and golden eagles are protected under the Bald and Golden Eagle Protection Act (16 U.S.C. 668 *et seq.*), and projects affecting these species may require development of an eagle conservation plan ([http://www.fws.gov/windenergy/eagle\\_guidance.html](http://www.fws.gov/windenergy/eagle_guidance.html)). Additionally, wind energy projects should follow the wind energy guidelines (<http://www.fws.gov/windenergy/>) for minimizing impacts to migratory birds and bats.

Guidance for minimizing impacts to migratory birds for projects including communications towers (e.g., cellular, digital television, radio, and emergency broadcast) can be found at: <http://www.fws.gov/migratorybirds/CurrentBirdIssues/Hazards/towers/towers.htm>; <http://www.towerkill.com>; and <http://www.fws.gov/migratorybirds/CurrentBirdIssues/Hazards/towers/comtow.html>.

We appreciate your concern for threatened and endangered species. The Service encourages Federal agencies to include conservation of threatened and endangered species into their project planning to further the purposes of the Act. Please include the Consultation Tracking Number in the header of this letter with any request for consultation or correspondence about your project that you submit to our office.

Attachment(s):

- Official Species List
  - USFWS National Wildlife Refuges and Fish Hatcheries
  - Migratory Birds
-

# Official Species List

This list is provided pursuant to Section 7 of the Endangered Species Act, and fulfills the requirement for Federal agencies to "request of the Secretary of the Interior information whether any species which is listed or proposed to be listed may be present in the area of a proposed action".

This species list is provided by:

**South Carolina Ecological Services**  
176 Croghan Spur Road, Suite 200  
Charleston, SC 29407-7558  
(843) 727-4707

---

## Project Summary

Consultation Code: 04ES1000-2019-SLI-0376

Event Code: 04ES1000-2019-E-00744

Project Name: KCLX WSR-88D Lower Scan Angle

Project Type: COMMUNICATIONS TOWER

Project Description: Lowering the minimum scan angle of the NWS radar

Project Location:

Approximate location of the project can be viewed in Google Maps: <https://www.google.com/maps/place/32.65516588613242N81.0427692194043W>



Counties: Jasper, SC

---

## Endangered Species Act Species

There is a total of 14 threatened, endangered, or candidate species on this species list.

Species on this list should be considered in an effects analysis for your project and could include species that exist in another geographic area. For example, certain fish may appear on the species list because a project could affect downstream species.

IPaC does not display listed species or critical habitats under the sole jurisdiction of NOAA Fisheries<sup>1</sup>, as USFWS does not have the authority to speak on behalf of NOAA and the Department of Commerce.

See the "Critical habitats" section below for those critical habitats that lie wholly or partially within your project area under this office's jurisdiction. Please contact the designated FWS office if you have questions.

- 
1. [NOAA Fisheries](#), also known as the National Marine Fisheries Service (NMFS), is an office of the National Oceanic and Atmospheric Administration within the Department of Commerce.

## Mammals

NAME	STATUS
West Indian Manatee <i>Trichechus manatus</i> There is <b>final</b> critical habitat for this species. Your location is outside the critical habitat. <b><i>This species is also protected by the Marine Mammal Protection Act, and may have additional consultation requirements.</i></b> Species profile: <a href="https://ecos.fws.gov/ecp/species/4469">https://ecos.fws.gov/ecp/species/4469</a>	Threatened

---

## Birds

NAME	STATUS
Eastern Black Rail <i>Laterallus jamaicensis ssp. jamaicensis</i> No critical habitat has been designated for this species. Species profile: <a href="https://ecos.fws.gov/ecp/species/10477">https://ecos.fws.gov/ecp/species/10477</a>	Proposed Threatened
Kirtland's Warbler <i>Setophaga kirtlandii</i> (= <i>Dendroica kirtlandii</i> ) No critical habitat has been designated for this species. Species profile: <a href="https://ecos.fws.gov/ecp/species/8078">https://ecos.fws.gov/ecp/species/8078</a>	Endangered
Piping Plover <i>Charadrius melodus</i> Population: [Atlantic Coast and Northern Great Plains populations] - Wherever found, except those areas where listed as endangered. There is <b>final</b> critical habitat for this species. Your location is outside the critical habitat. Species profile: <a href="https://ecos.fws.gov/ecp/species/6039">https://ecos.fws.gov/ecp/species/6039</a>	Threatened
Red-cockaded Woodpecker <i>Picoides borealis</i> No critical habitat has been designated for this species. Species profile: <a href="https://ecos.fws.gov/ecp/species/7614">https://ecos.fws.gov/ecp/species/7614</a>	Endangered
Wood Stork <i>Mycteria americana</i> Population: AL, FL, GA, MS, NC, SC No critical habitat has been designated for this species. Species profile: <a href="https://ecos.fws.gov/ecp/species/8477">https://ecos.fws.gov/ecp/species/8477</a>	Threatened

## Reptiles

NAME	STATUS
Green Sea Turtle <i>Chelonia mydas</i> Population: North Atlantic DPS No critical habitat has been designated for this species. Species profile: <a href="https://ecos.fws.gov/ecp/species/6199">https://ecos.fws.gov/ecp/species/6199</a>	Threatened
Kemp's Ridley Sea Turtle <i>Lepidochelys kempii</i> There is <b>proposed</b> critical habitat for this species. The location of the critical habitat is not available. Species profile: <a href="https://ecos.fws.gov/ecp/species/5523">https://ecos.fws.gov/ecp/species/5523</a>	Endangered
Leatherback Sea Turtle <i>Dermochelys coriacea</i> There is <b>final</b> critical habitat for this species. Your location is outside the critical habitat. Species profile: <a href="https://ecos.fws.gov/ecp/species/1493">https://ecos.fws.gov/ecp/species/1493</a>	Endangered
Loggerhead Sea Turtle <i>Caretta caretta</i> Population: Northwest Atlantic Ocean DPS There is <b>final</b> critical habitat for this species. Your location is outside the critical habitat. Species profile: <a href="https://ecos.fws.gov/ecp/species/1110">https://ecos.fws.gov/ecp/species/1110</a>	Threatened

## Amphibians

NAME	STATUS
Frosted Flatwoods Salamander <i>Ambystoma cingulatum</i> There is <b>final</b> critical habitat for this species. Your location is outside the critical habitat. Species profile: <a href="https://ecos.fws.gov/ecp/species/4981">https://ecos.fws.gov/ecp/species/4981</a>	Threatened

## Flowering Plants

NAME	STATUS
American Chaffseed <i>Schwalbea americana</i> No critical habitat has been designated for this species. Species profile: <a href="https://ecos.fws.gov/ecp/species/1286">https://ecos.fws.gov/ecp/species/1286</a>	Endangered
Canby's Dropwort <i>Oxypolis canbyi</i> No critical habitat has been designated for this species. Species profile: <a href="https://ecos.fws.gov/ecp/species/7738">https://ecos.fws.gov/ecp/species/7738</a>	Endangered
Pondberry <i>Lindera melissifolia</i> No critical habitat has been designated for this species. Species profile: <a href="https://ecos.fws.gov/ecp/species/1279">https://ecos.fws.gov/ecp/species/1279</a>	Endangered

## Critical habitats

THERE ARE NO CRITICAL HABITATS WITHIN YOUR PROJECT AREA UNDER THIS OFFICE'S JURISDICTION.

# USFWS National Wildlife Refuge Lands And Fish Hatcheries

Any activity proposed on lands managed by the [National Wildlife Refuge](#) system must undergo a 'Compatibility Determination' conducted by the Refuge. Please contact the individual Refuges to discuss any questions or concerns.

THERE ARE NO REFUGE LANDS OR FISH HATCHERIES WITHIN YOUR PROJECT AREA.

---

# Migratory Birds

Certain birds are protected under the Migratory Bird Treaty Act<sup>1</sup> and the Bald and Golden Eagle Protection Act<sup>2</sup>.

Any person or organization who plans or conducts activities that may result in impacts to migratory birds, eagles, and their habitats should follow appropriate regulations and consider implementing appropriate conservation measures, as described [below](#).

- 
1. The [Migratory Birds Treaty Act](#) of 1918.
  2. The [Bald and Golden Eagle Protection Act](#) of 1940.
  3. 50 C.F.R. Sec. 10.12 and 16 U.S.C. Sec. 668(a)

THERE ARE NO FWS MIGRATORY BIRDS OF CONCERN WITHIN THE VICINITY OF YOUR PROJECT AREA.

## Migratory Birds FAQ

**Tell me more about conservation measures I can implement to avoid or minimize impacts to migratory birds.**

[Nationwide Conservation Measures](#) describes measures that can help avoid and minimize impacts to all birds at any location year round. Implementation of these measures is particularly important when birds are most likely to occur in the project area. When birds may be breeding in the area, identifying the locations of any active nests and avoiding their destruction is a very helpful impact minimization measure. To see when birds are most likely to occur and be breeding in your project area, view the Probability of Presence Summary. [Additional measures](#) and/or [permits](#) may be advisable depending on the type of activity you are conducting and the type of infrastructure or bird species present on your project site.

**What does IPaC use to generate the migratory birds potentially occurring in my specified location?**

The Migratory Bird Resource List is comprised of USFWS [Birds of Conservation Concern \(BCC\)](#) and other species that may warrant special attention in your project location.

The migratory bird list generated for your project is derived from data provided by the [Avian Knowledge Network \(AKN\)](#). The AKN data is based on a growing collection of [survey, banding, and citizen science datasets](#) and is queried and filtered to return a list of those birds reported as occurring in the 10km grid cell(s) which your project intersects, and that have been identified as warranting special attention because they are a BCC species in that area, an eagle ([Eagle Act](#) requirements may apply), or a species that has a particular vulnerability to offshore activities or development.

---

Again, the Migratory Bird Resource list includes only a subset of birds that may occur in your project area. It is not representative of all birds that may occur in your project area. To get a list of all birds potentially present in your project area, please visit the [E-bird Explore Data Tool](#).

### **What does IPaC use to generate the probability of presence graphs for the migratory birds potentially occurring in my specified location?**

The probability of presence graphs associated with your migratory bird list are based on data provided by the [Avian Knowledge Network \(AKN\)](#). This data is derived from a growing collection of [survey, banding, and citizen science datasets](#).

Probability of presence data is continuously being updated as new and better information becomes available. To learn more about how the probability of presence graphs are produced and how to interpret them, go to the Probability of Presence Summary and then click on the "Tell me about these graphs" link.

### **How do I know if a bird is breeding, wintering, migrating or present year-round in my project area?**

To see what part of a particular bird's range your project area falls within (i.e. breeding, wintering, migrating or year-round), you may refer to the following resources: [The Cornell Lab of Ornithology All About Birds Bird Guide](#), or (if you are unsuccessful in locating the bird of interest there), the [Cornell Lab of Ornithology Neotropical Birds guide](#). If a bird on your migratory bird species list has a breeding season associated with it, if that bird does occur in your project area, there may be nests present at some point within the timeframe specified. If "Breeds elsewhere" is indicated, then the bird likely does not breed in your project area.

### **What are the levels of concern for migratory birds?**

Migratory birds delivered through IPaC fall into the following distinct categories of concern:

1. "BCC Rangewide" birds are [Birds of Conservation Concern](#) (BCC) that are of concern throughout their range anywhere within the USA (including Hawaii, the Pacific Islands, Puerto Rico, and the Virgin Islands);
2. "BCC - BCR" birds are BCCs that are of concern only in particular Bird Conservation Regions (BCRs) in the continental USA; and
3. "Non-BCC - Vulnerable" birds are not BCC species in your project area, but appear on your list either because of the [Eagle Act](#) requirements (for eagles) or (for non-eagles) potential susceptibilities in offshore areas from certain types of development or activities (e.g. offshore energy development or longline fishing).

Although it is important to try to avoid and minimize impacts to all birds, efforts should be made, in particular, to avoid and minimize impacts to the birds on this list, especially eagles and BCC species of rangewide concern. For more information on conservation measures you can implement to help avoid and minimize migratory bird impacts and requirements for eagles, please see the FAQs for these topics.

### **Details about birds that are potentially affected by offshore projects**

---

For additional details about the relative occurrence and abundance of both individual bird species and groups of bird species within your project area off the Atlantic Coast, please visit the [Northeast Ocean Data Portal](#). The Portal also offers data and information about other taxa besides birds that may be helpful to you in your project review. Alternately, you may download the bird model results files underlying the portal maps through the [NOAA NCCOS Integrative Statistical Modeling and Predictive Mapping of Marine Bird Distributions and Abundance on the Atlantic Outer Continental Shelf](#) project webpage.

Bird tracking data can also provide additional details about occurrence and habitat use throughout the year, including migration. Models relying on survey data may not include this information. For additional information on marine bird tracking data, see the [Diving Bird Study](#) and the [nanotag studies](#) or contact [Caleb Spiegel](#) or [Pam Loring](#).

### **What if I have eagles on my list?**

If your project has the potential to disturb or kill eagles, you may need to [obtain a permit](#) to avoid violating the Eagle Act should such impacts occur.

### **Proper Interpretation and Use of Your Migratory Bird Report**

The migratory bird list generated is not a list of all birds in your project area, only a subset of birds of priority concern. To learn more about how your list is generated, and see options for identifying what other birds may be in your project area, please see the FAQ “What does IPaC use to generate the migratory birds potentially occurring in my specified location”. Please be aware this report provides the “probability of presence” of birds within the 10 km grid cell(s) that overlap your project; not your exact project footprint. On the graphs provided, please also look carefully at the survey effort (indicated by the black vertical bar) and for the existence of the “no data” indicator (a red horizontal bar). A high survey effort is the key component. If the survey effort is high, then the probability of presence score can be viewed as more dependable. In contrast, a low survey effort bar or no data bar means a lack of data and, therefore, a lack of certainty about presence of the species. This list is not perfect; it is simply a starting point for identifying what birds of concern have the potential to be in your project area, when they might be there, and if they might be breeding (which means nests might be present). The list helps you know what to look for to confirm presence, and helps guide you in knowing when to implement conservation measures to avoid or minimize potential impacts from your project activities, should presence be confirmed. To learn more about conservation measures, visit the FAQ “Tell me about conservation measures I can implement to avoid or minimize impacts to migratory birds” at the bottom of your migratory bird trust resources page.

---

**APPENDIX C**

**TECHNICAL MEMORANDUM / TRIP REPORT**

**TECHNICAL MEMORANDUM**

<b>TO:</b> Edward Ciardi, Program Manager, EVP Weather Systems, Centuria Corporation	<b>FROM:</b> James Manidakos, CEO, Sensor Environmental LLC
<b>CC:</b> Jessica Schultz, Radar Focal Point, National Weather Service Andre Tarpinian, Senior RF Engineer, Alion Science and Technology Corp.	<b>SUBJECT:</b> Analysis of Lower Scan Angles For Weather Surveillance Radar, Model 1988 Doppler (WSR-88D) Serving Charleston, SC, Area
<b>DATE:</b> March 13, 2019	

**1. BACKGROUND AND NEED**

The National Weather Service (NWS) proposes to reduce the minimum vertical scan angles used during normal operation of the WSR-88D serving Charleston, SC, area. Information on this radar is shown in Table 1. This WSR-88D was commissioned in June 1996 and has been in operation at its current location since then.

<b>TABLE 1: INFORMATION ON WSR-88D SERVING THE MINOT, SD, AREA</b>	
Location	State Road S 27-41 (a.k.a. Beaver Dam Road), Jasper County, SC
International Civil Aviation Organization designator	KCLX
Elevation, ground surface at tower base (mean sea level, MSL)	115 ft
Elevation, center of antenna (MSL)	228 ft
Tower Height (m)	30 m (98 ft)
Latitude (WGS84)	32° 39' 19.9" N
Longitude (WGS84)	81° 02' 31.9" W
Weather Forecast Office (WFO)	5777 South Aviation Avenue North Charleston, SC 29406-6162
Meteorologist-in-Charge (MIC)	Michael Emlaw Email: <a href="mailto:michael.emlaw@noaa.gov">michael.emlaw@noaa.gov</a> Tel. 843-747-5860
Operating Frequency	2,810 megaHertz (MHz)
Spot Blanking or Sector Blanking used	No

NWS currently operates the KCLX WSR-88D at a minimum center-of-beam scan angle of +0.5 degree (deg). The WSR-88D main beam has a width of 1 deg to the half power points. Half of the beam (i.e., 0.5 deg) is below the axis, resulting in an essentially horizontal floor for existing radar coverage. As a result, the WSR-88D cannot provide radar coverage of the atmosphere below the elevation of the WSR-88D antenna. At considerable distance from the radar, earth curvature increases the height above the ground surface of the uncovered area. To increase the amount of radar coverage provided by the KCLX WSR-88D, NWS proposes to operate the radar with a center-of-beam scan angle as low -0.2 deg, which would result in the lower half power point of the main beam at -0.7 deg.

## **2. INVESTIGATIONS PERFORMED**

To analyze the benefits and potential impacts of lowering the scan angle of the KCLX WSR-88D, Sensor Environmental LLC and our subcontractor Alion Science and Technology Corporation performed the following tasks:

1. We visited the KCLX WSR-88D with NWS staff from the Charleston, SC, Weather Forecast Office (WFO) to ascertain site conditions and activities in the vicinity (see Attachment A, Trip Report).
2. We obtained 360-degree calibrated panoramic photograph taken at 25-m level of the WSR-88D tower, which is about 30 ft lower than the center of antenna height.
3. We prepared maps showing the extent of WSR-88D coverage at 2,000 ft above site level for each (center of beam) scan angle from the current minimum of +0.5 degree to -0.2 degree.
4. We identified areas of terrain and potentially sensitive activities in proximity to the KCLX WSR-88D that would be directly illuminated by the main beam at each lower scan angle under consideration by NWS.
5. We calculated the change in height of KCLX WSR-88D radar coverage above ground level for the Myrtle Beach, SC area of interest.

## **3. WSR-88D COVERAGE**

The Project team used Alion Integrated Target Acquisition System (ITAS) terrain-based computer model with GIS-based interface to project the terrain-dependent radar coverage for the KCLX WSR-88D at 2,000 ft above site level (ASL). The radar coverages shown in Attachment B are based on Digital Terrain Elevation Data (DTED) Level 2 topographic data and 4/3 earth radius to account for atmospheric refraction of the WSR-88D main beam. The lower half-power point of the unobstructed WSR-88D main beam is considered the minimum elevation of KCLX WSR-88D coverage. Table 2 shows coverage areas at 2,000 ft above site level (ASL) for KCLX WSR-88D for the range of minimum scan angles under consideration by NWS.

**TABLE 2: KCLX WSR-88D Radar Coverage Areas for Minimum Scan Angles**

<b>Coverage Altitude (ft ASL)</b>	<b>Minimum Center of Beam Scan Angle (deg)</b>	<b>Lower Half-power Point (deg)</b>	<b>Area in Lambert Projection (sq mi)</b>	<b>Change from Existing Minimum Scan Angle</b>
2,000	+0.5 (existing)	0.0	10,676	n/a
2,000	+0.4	-0.1	14,395	+34.8%
2,000	+0.3	-0.2	18,343	+71.8%
2,000	+ 0.2, +0.1, 0.0, -0.1, -0.2	-0.2 to -0.7	18,792	+76.0%

KCLX WSR-88D is located in a rural agricultural portion of Jasper County, about 66 miles west of Charleston, SC and 41 miles north of Savannah, GA. When operating at the current minimum center of beam minimum scan angle of +0.5 deg, the KCLX WSR-88D is not subject to terrain blockage (see Attachment B). At a minimum scan angle of +0.4 deg, coverage would increase in all directions as no terrain blockage would result. At a minimum scan angle of +0.3 deg, no terrain blockage would occur to the northeast through southwest (azimuths 65 through 215 where 0 = true north, 90 = east, 180 = south, 270 = west), and minor terrain blockage would occur from southwest through west and north through northeast (azimuths 215 through 280 and 10 through 65). More substantial terrain blockage would occur to the northwest and north (azimuths 280 through 10). Operating the KCLX at a minimum scan angle of +0.3 deg would increase coverage area at 2,000 ft ASL by 71.8%.

At a minimum scan angle of +0.2 deg, terrain blockage would occur in all directions; modest increases in radar coverage would occur to the east, southeast and south (azimuths 65 through 200). Operating at a minimum scan angle of +0.2 deg would further increase coverage area by an additional 4.2% compared to a minimum scan angle of +0.3 deg. Scan angles lower than +0.2 deg would not add additional coverage.

The Myrtle Beach, SC, area is of special interest with respect to the potential for improved radar coverage. Myrtle Beach is about 140 miles east-northeast (azimuth 60) of the KCLX WSR-88D. Downtown Myrtle Beach is at elevation 30 ft MSL. Table 3 shows the existing height of the center of the WSR-88D beam and the radar coverage floor over Myrtle Beach at the current minimum scan angle of +0.5 deg and lower scan angles down to +0.3 deg. Lowering the minimum scan angle of the KCLX WSR-88D would reduce the radar coverage floor (i.e. lower half-power point of main beam) over Myrtle Beach from the current 10,000 ft above ground

level (AGL) to 7,400 ft AGL. Terrain blockage between the KCLX WSR-88D and Myrtle Beach would prevent reduction in beam height or coverage floor altitude for scan angles lower than +0.3 deg.

<b>WSR-88D</b>	<b>Minimum Scan Angle (deg)</b>	<b>Center of Beam Altitude (ft AGL)</b>	<b>Radar Coverage Floor (ft AGL)</b>
KCLX	+0.5 (existing)	16,400	10,000
	+0.4	15,200	8,700
	+0.3, +0.2, +0.1, +0.0, -0.1, -0.2	13,900	7,400

#### 4. HUMAN EXPOSURE AND POTENTIALLY RF-SENSITIVE ACTIVITIES

Exposure to the WSR-88D main beam could represent a hazard to persons and certain sensitive activities. Table 4 presents the safe setback distances from the WSR-88D for human exposure, implantable medical devices, fuel handling, and EEDs (Sensor Environmental LLC, 2011). Safety standards for implantable medical devices, fuel handling, and EEDs are based on instantaneous exposure. Safety Standards for human exposure are based on time-averaged exposure; therefore exposure during both rotating antenna and stationary-antenna operation are considered.

<b>Activity</b>	<b>Safe Setback Distance (ft)</b>		<b>Source</b>
Human Exposure	Rotating Antenna	20	American National Standards Institute/Institute of Electrical and Electronic Engineers (ANSI/IEEE) and International Council for Non-Ionizing Radiation Protection (ICNIRP)
	Stationary Antenna	1,700	
Implantable Medical devices	2,060		ANSI/Association for the Advancement of Medical Instrumentation (AAMI)
EEDs	6,030		U.S. Air Force
Fuel Handling	537		Naval Sea Systems Command

## **5. DIRECTLY ILLUMINATED TERRAIN**

Exposure to radiofrequency (RF) radiation can potentially be harmful to humans and RF-sensitive activities. The safe setback distances from the WSR-88D for human exposure, implantable medical devices, fuel handling, and electro-explosive devices (EEDs) are given in section 4 of this memorandum. The greatest safe setback distance for human exposure or any of these activities is 6,030 ft for exposure of EEDs, which include blasting caps, some types of ordnance, and equipment used in aviation systems (e.g. ejection seats and separation systems for air-launched missiles).

There would be no directly illuminated terrain within 3 miles at scan angles of +0.5 deg, 0+0.4 deg, +0.3, or +0.2 deg. Attachment C shows terrain within 3 miles of the KCLX WSR-88D that would be directly illuminated by the WSR-88D main beam at a lower center of beam scan angle of +0.1 deg or lower. A scan angle of +0.1 deg, the KCLX main beam would impinge on the ground to the south, southwest, and west of the radar at a distance of 13,500 ft (2.6 miles). That distance is farther than all safety setback distances from the WSR-88D. No hazards to persons or potentially sensitive activities would result from lowering the minimum scan angle down to +0.1 deg.

Photographs 2A through 2D in attachment A were taken from the 25-m level of the KCLX tower and show a 360 deg view of the horizon. No structures in the vicinity rise above the horizon and lowering the KCLX minimum scan angle would not result in the WSR-88D main beam impinging on structures within safe setback distances. No RF-exposure hazards would result to persons or potentially RF-sensitive activities. As shown in photographs 2A and 2B, individual trees located to the northeast and east of the WSR-88D rise slightly above the panoramic horizon. However, the horizon is based on the elevation of the camera setup which is 30 ft below the center of the WSR-88D antenna; therefore those trees do not substantially obstruct the WSR-88D main beam.

## **6. ASTRONOMICAL OBSERVATORIES**

The WSR-88D can potentially cause harmful electromagnetic interference (EMI) with charge-couple devices (CCDs) which electronically record data collected by astronomical telescopes (NEXRAD JSPO, 1993). Due to the sensitivity of astronomical equipment which is designed to detect very faint signals from space, this equipment is vulnerable to EMI. The potential for harmful EMI would arise if the WSR-88D main beam would directly impinge on an astronomical observatory during low angle scanning. Table 5 lists astronomical observatories located within 150 miles of the KCLX WSR-88D and provide distances and azimuths to the observatories from the WSR-88D based on true north. The table also shows whether or not the WSR-88D main beam at scan angles of +0.5 deg to +0.2 deg would impinge on each observatory. Impingement would not result if terrain or structural blockage is present between

the observatory and WSR-88D or if the elevation of the lower half-power point of the main beam at the observatory location would be higher than the observatory elevation.

<b>TABLE 5: ASTRONOMICAL OBSERVATORIES WITHIN 150 MILES OF THE KCLX WSR-88D</b>				
<b>Observatory</b>	<b>Location</b>	<b>Distance from WSR-88D / azimuth</b>	<b>Observatory elevation (ft MSL)</b>	<b>KCLX WSR-88D main beam impinges at 0.5 deg or below?</b>
Melton Memorial	Columbia, SC	93 mi / 355 deg	350	No at +0.5 to +0.2 deg
Francis Marion	Florence, SC	133 mi / 35 deg	120	No at +0.5 to +0.2 deg

Lowering the minimum scan angle of the KCLX WSR-88D down to +0.2 deg would not result in the main beam impinging on astronomical observatories.

**7. RECOMMENDATION**

Lowering the minimum scan angle of the KCLX WSR-88D serving the Charleston, SC, area to +0.3 deg would increase coverage area at 2,000 ft above site level by 71.8% and would not result in adverse effects to person or activities or astronomical observatories. Compared to current WSR-88D coverage, the minimum height of radar coverage over Myrtle Beach, SC would be reduced by 10,000 to 7,400 ft AGL. A minimum scan angle of +0.2 deg would minimally increase coverage area by an additional 4.2%, but would not improve coverage over the Myrtle Beach area and would result in increased ground clutter returns. Therefore, a minimum scan angle of +0.3 deg is recommended for the KCLX WSR-88D.

**8. MEMORANDUM AUTHORS**

This memorandum was prepared by Sensor Environmental LLC under contract to Centuria Corporation, which is a support contractor to the National Weather Radar Operations Center. Mr. James Manidakos, CEO, served as Sensor’s Project Manager. Alion Science and Technology Corporation prepared radar coverage maps and calculated coverage areas under subcontract to Sensor. Mr. Andre Tarpinian, Radio Frequency Engineer, served as Alion’s Project Manager.

**9. REFERENCES**

American National Standards Institute/Institute of Electrical and Electronic Engineers (ANSI/IEEE). *IEEE Standard for Safety Levels with respect to Human Exposure to Radio*

*Frequency Electromagnetic Fields, 3 kHz to 300 GHz*. IEEE Std C95.1-2005 (April 19, 2006).

ANSI/AAMI. *American National Standard, Active Implantable Medical Devices – Electromagnetic compatibility – EMC test protocols for cardiac pacemakers and implantable cardioverter defibrillators*, ANSI/AAMI PC69:2007 (2007).

FCC, Database Search, <https://www.fcc.gov/licening-databases/general/search-fcc-database>, accessed February 5, 2017.

Go Astronomy, [www.go-astronomy.com/observatories.htm](http://www.go-astronomy.com/observatories.htm), accessed September 11, 2018.

ICNIRP. “ICNIRP Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz).” Published in *Health Physics Society*, **1998**, 74(4), pp. 494-522.

ICNIRP. Statement on the “Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz).” Published in *Health Physics Society*, 2009, 97(3), pp. 257-258.

Naval Sea Systems Command. *Technical Manual, Electromagnetic Radiation Hazards (U), (Hazards to Personnel, Fuel, and Other Flammable Material) (U)*, NAVSEA OP 3565/NAVAIR 16-1-529, Volume 1, Sixth Revision (February 1, 2003).

Naval Sea Systems Command. *Technical Manual, Electromagnetic Radiation Hazards (U), (Hazards to Ordnance) (U)*, NAVSEA OP 3565/NAVAIR 16-1-529, Volume 2, Seventeenth Revision, (September 11, 2008).

NEXRAD JSPO. *Final Supplemental Environmental Assessment (SEA) of the Effects of Electromagnetic Radiation from the WSR-88D Radar* (April 1993).

NTIA. *Manual of Regulations and Procedures for Federal Radio Frequency Management*. May 2014.

Schultz, Jessica, NWS Radar Focal Point, email to James Manidakos, Sensor Environmental LLC. September 13, 2018.

Sensor Environmental LLC, Supplemental Environmental Assessment (EA) of the Electromagnetic Effects of Operating Weather Service Radar – 1988 Doppler (WSR-88D) to Serve Coastal Washington at Scan Angles Below +0.5 Degree. Prepared for National Weather Service/Centuria Corporation, September 2011.

U.S. Air Force. *Explosive Safety Standards*. U.S. Air Force Regulation 127-100(c1). July 27, 1982.

**ATTACHMENT A**  
**TRIP REPORT, KCLX WSR-88D**

## **TRIP REPORT**

**Traveler:** James Manidakos, Sensor Environmental LLC

**Destination:** Charleston, SC, Weather Surveillance Radar, Model 1988 Doppler (WSR-88D)

**Dates:** March 3-4, 2019


**Purpose:** Field Inspection of KCLX WSR-88D serving Charleston, SC, area

**Summary:** March 3, 2019, Mr. Manidakos flew from San Jose, CA, to Charleston, SC.


March 4, 2019: Mr. Manidakos met at the KCLX WSR-88D WFO with Electronics Technician Scott Edwards. Mr. Manidakos took ground-level photograph of the KCLX WSR-88D ( see Photograph 1) and climbed the KCLX WSR-88D tower to take panoramic photographs (Photographs 2A through 2D) from the 25-m level of the KCLX WSR-88D, which is about 30 ft below the center of the WSR-88D antenna.

Weather: 50° F, partly cloudy, with moderate winds

March 5, 2019, Mr. Manidakos travelled to Boston, MA.

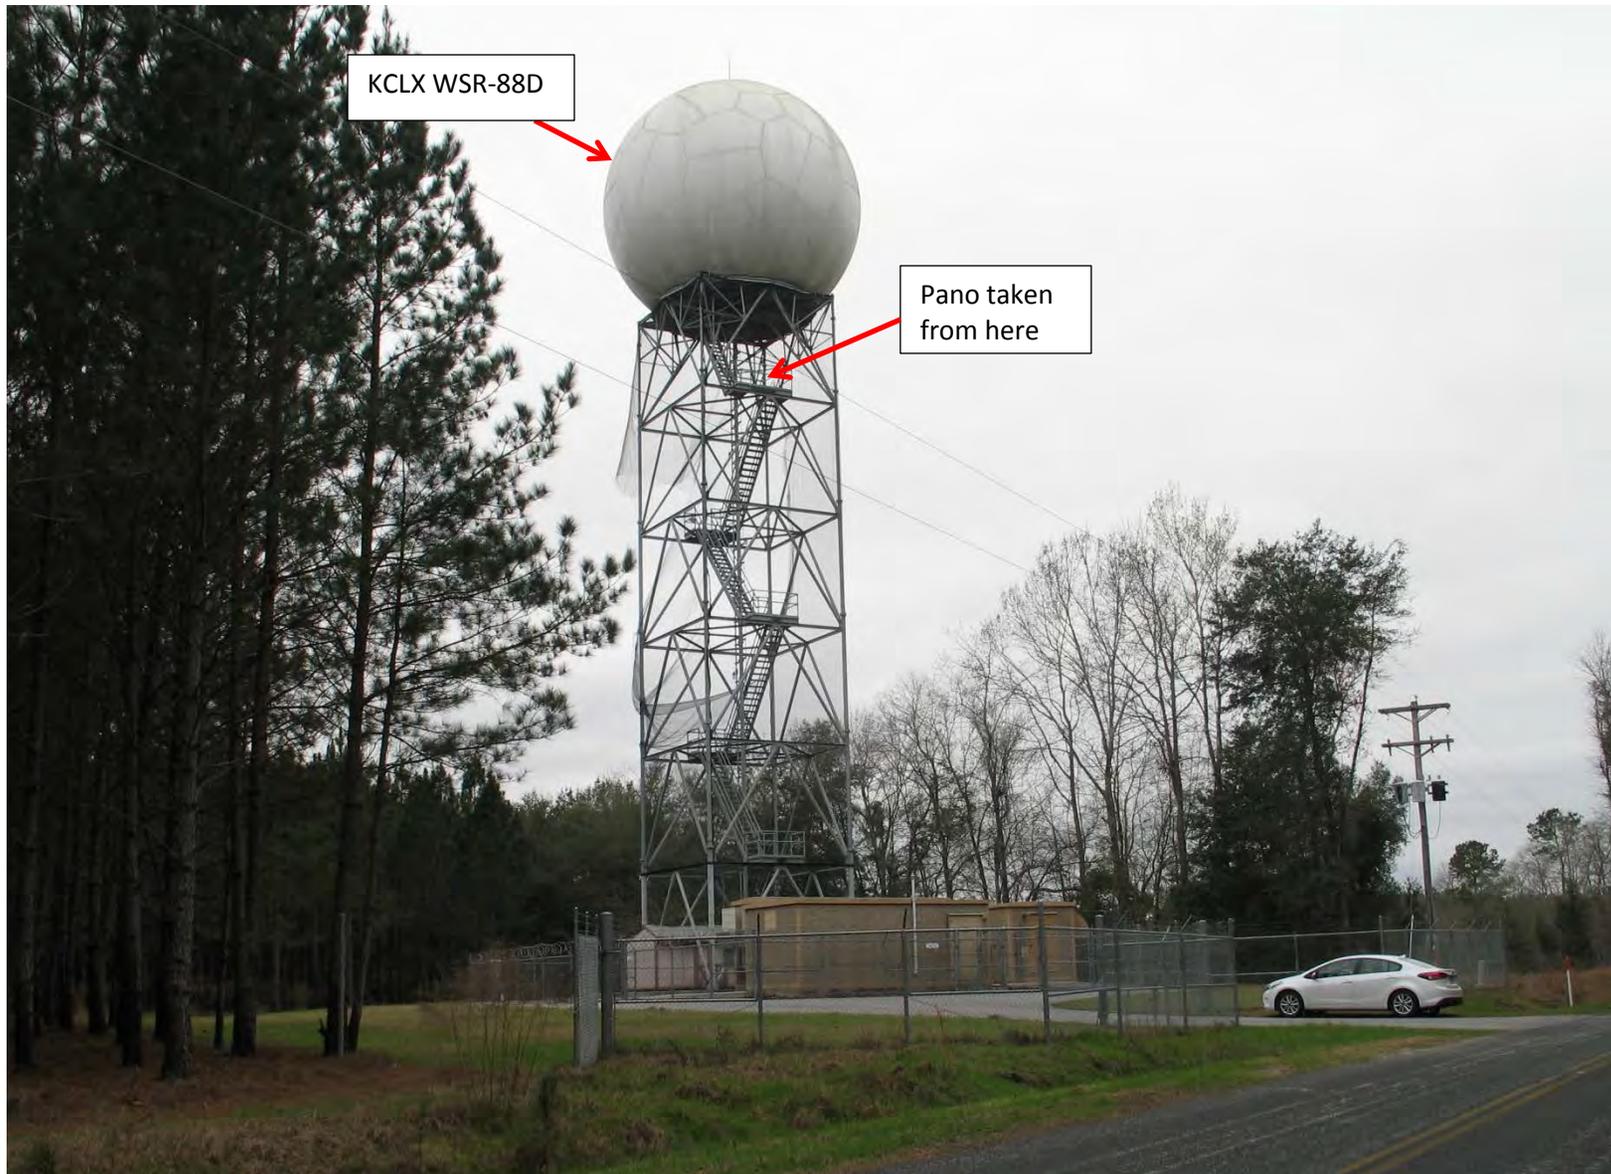

**Photograph 1:** KCLX WSR-88D serving Charleston SC, area viewed from east.

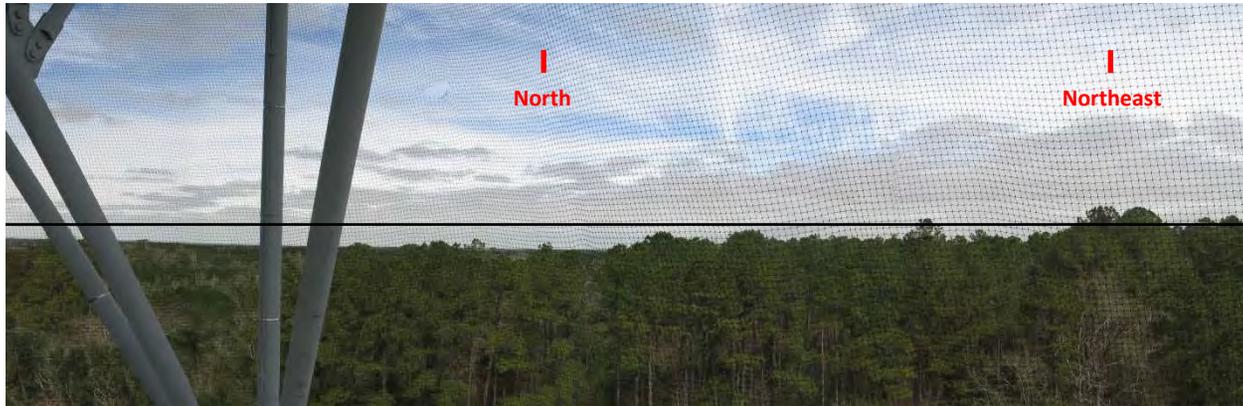

**Photograph 2A:** Panoramic photograph from KCLX WSR-88D tower [ — 0 deg]



**Photograph 2B:** Panoramic photograph from KCLX WSR-88D tower [ — 0 deg]



**Photograph 2C:** Panoramic photograph from KCLX WSR-88D tower [ — 0 deg]



**Photograph 2D:** Panoramic photograph from KCLX WSR-88D tower [ — 0 deg]

**ATTACHMENT B**

**KCLX WSR-88D COVERAGE MAP**


**MINIMUM SCAN ANGLES +0.5 deg to -0.2 deg**



**Radar Coverage at 2,000 ft ASL**  
**Minimum Center of Beam Elevation Angle**

Red	+0.5 deg	Green	+0.3 deg
Yellow	+0.4 deg	Blue	+0.2, +0.1, 0.0, -0.1, and -0.2 deg

+ KCLX - Charleston, SC  
 — Major Highway




**Lambert Projection**  
 Central Meridian: -96  
 1st Std Parallel: 20  
 2nd Std Parallel: 60  
 Latitude of Origin: 40


**ATTACHMENT C**


**KCLX WSR-88D NEARBY DIRECTLY ILLUMINATED TERRAIN**

**AT SCAN ANGLES OF +0.1 to -0.2 deg**

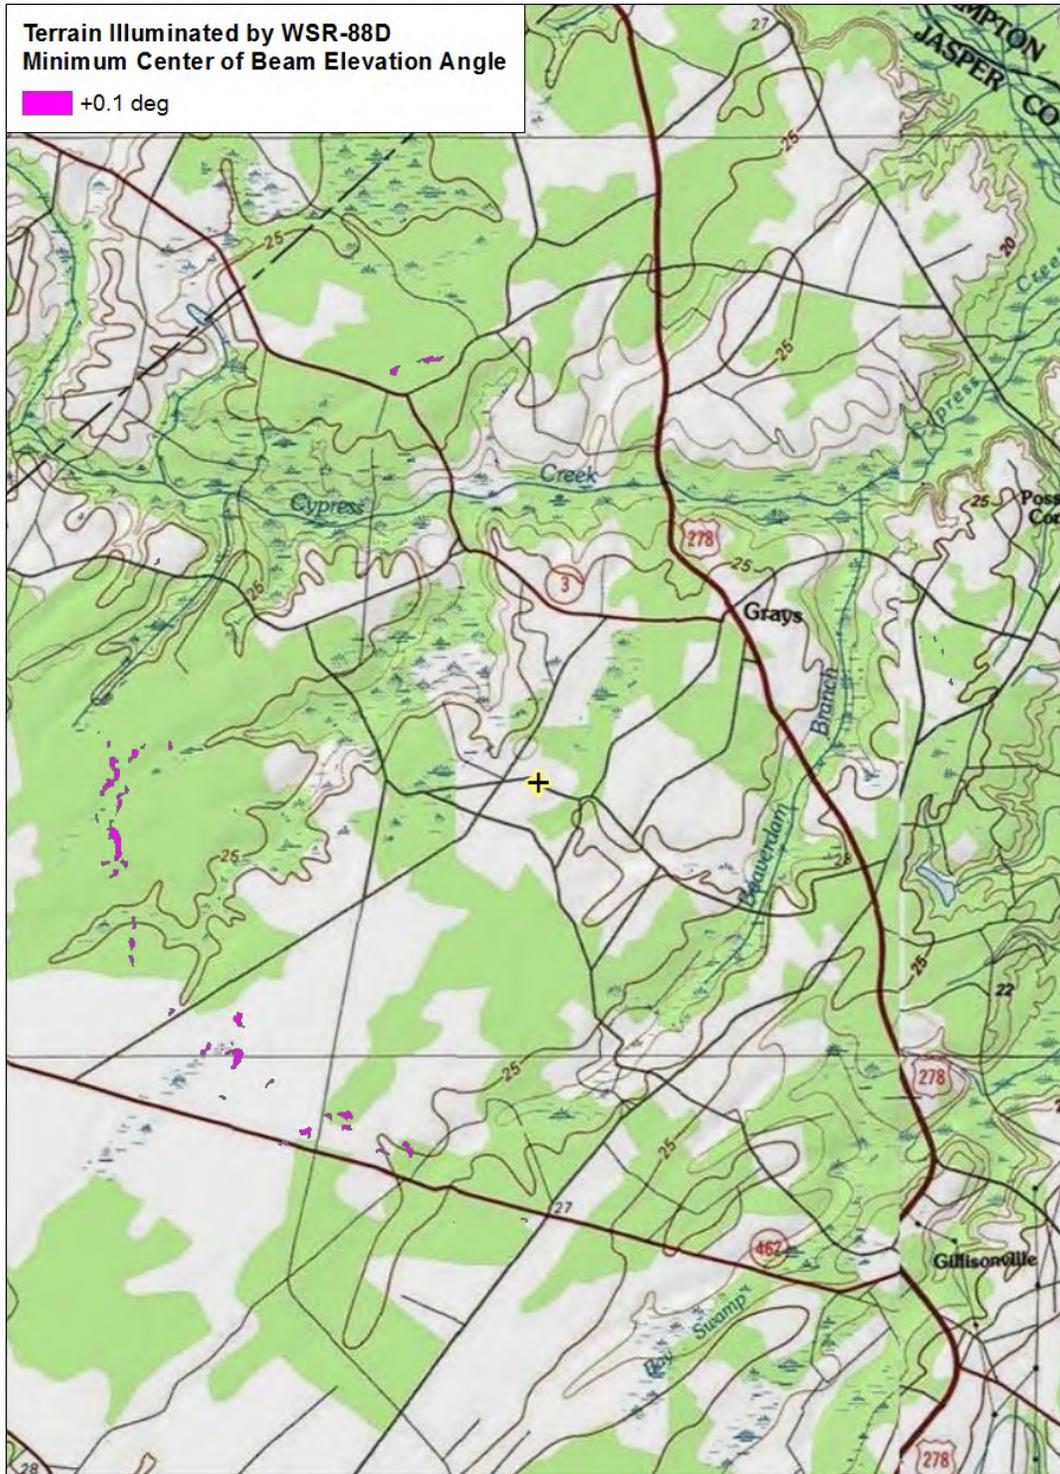



 KCLX - Charleston, SC



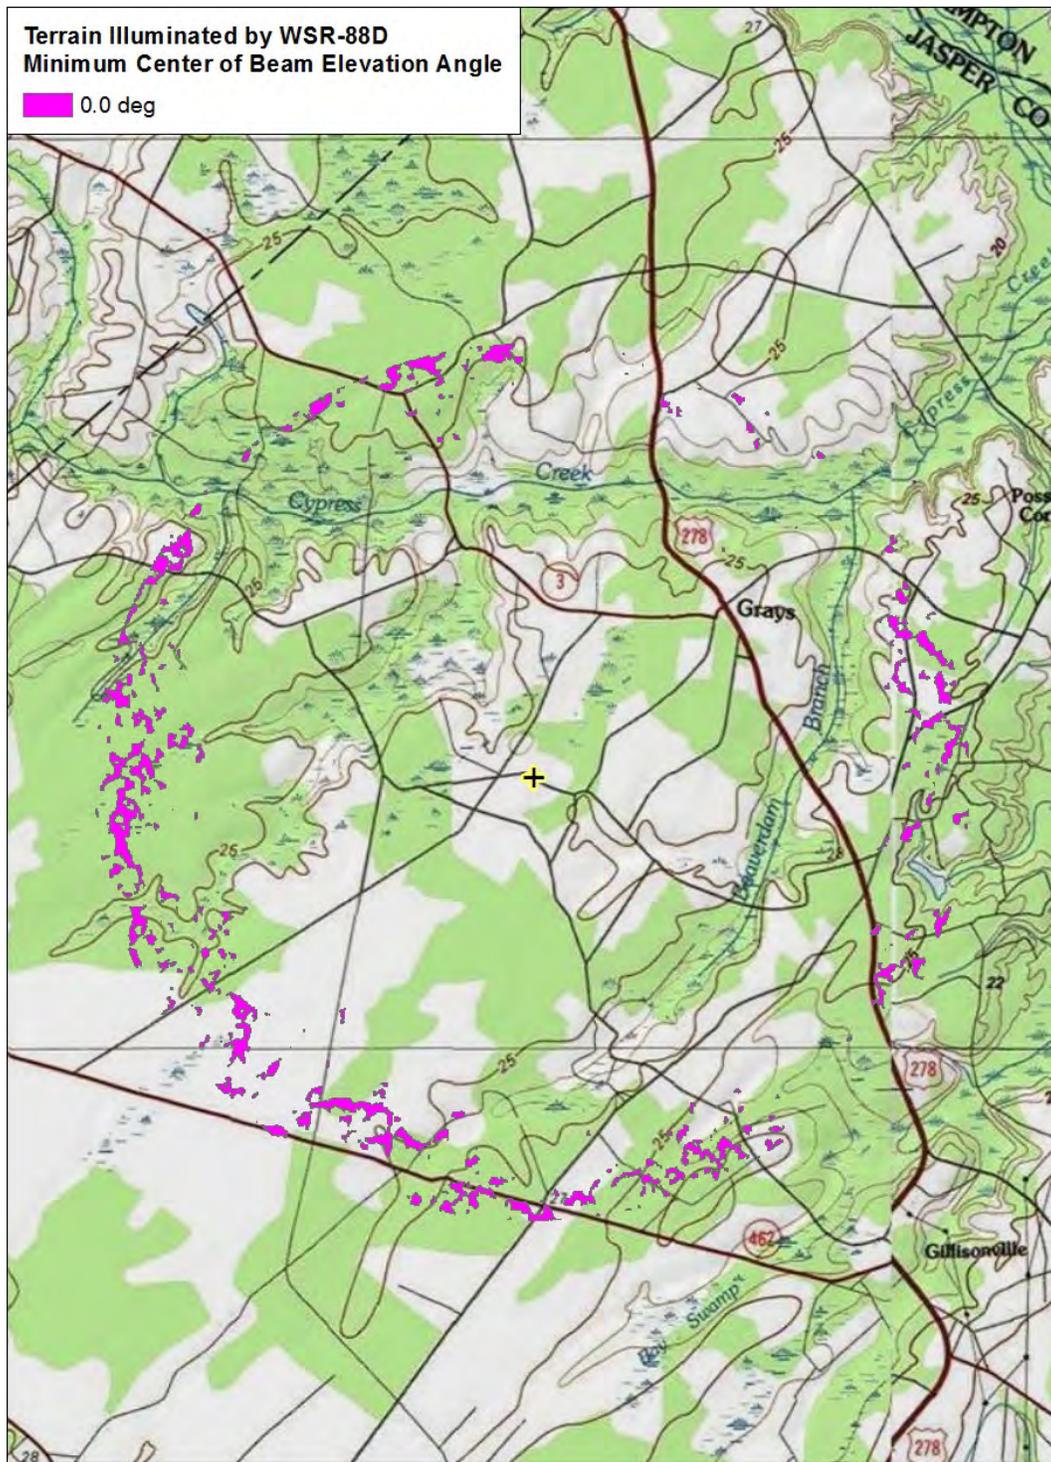


+ KCLX - Charleston, SC



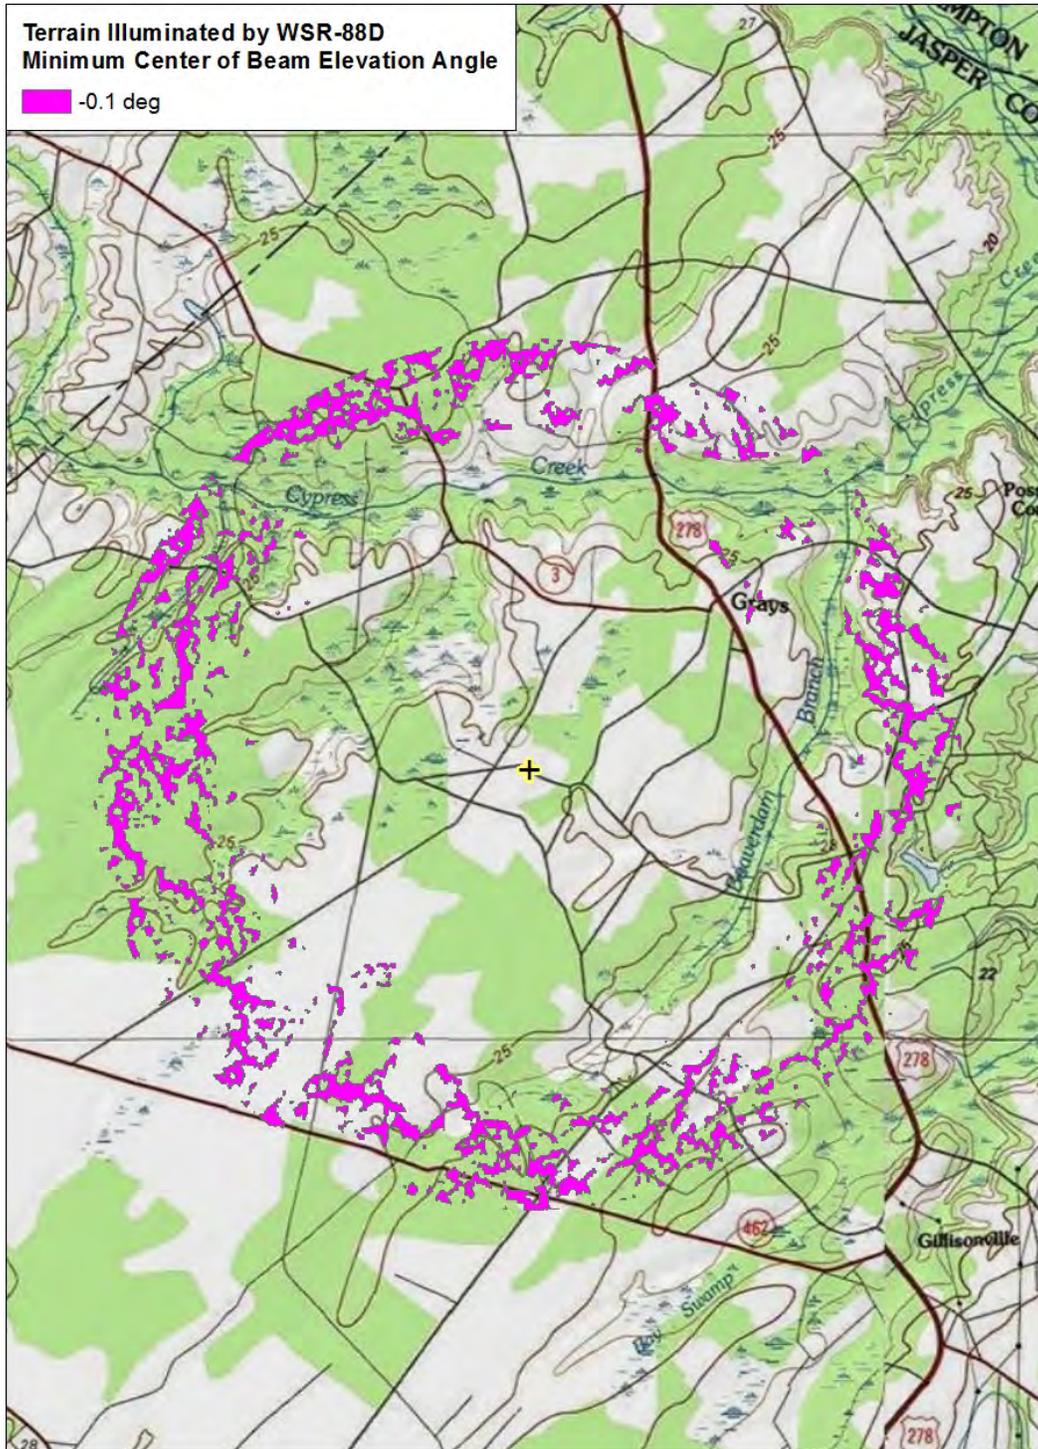

✚ KCLX - Charleston, SC



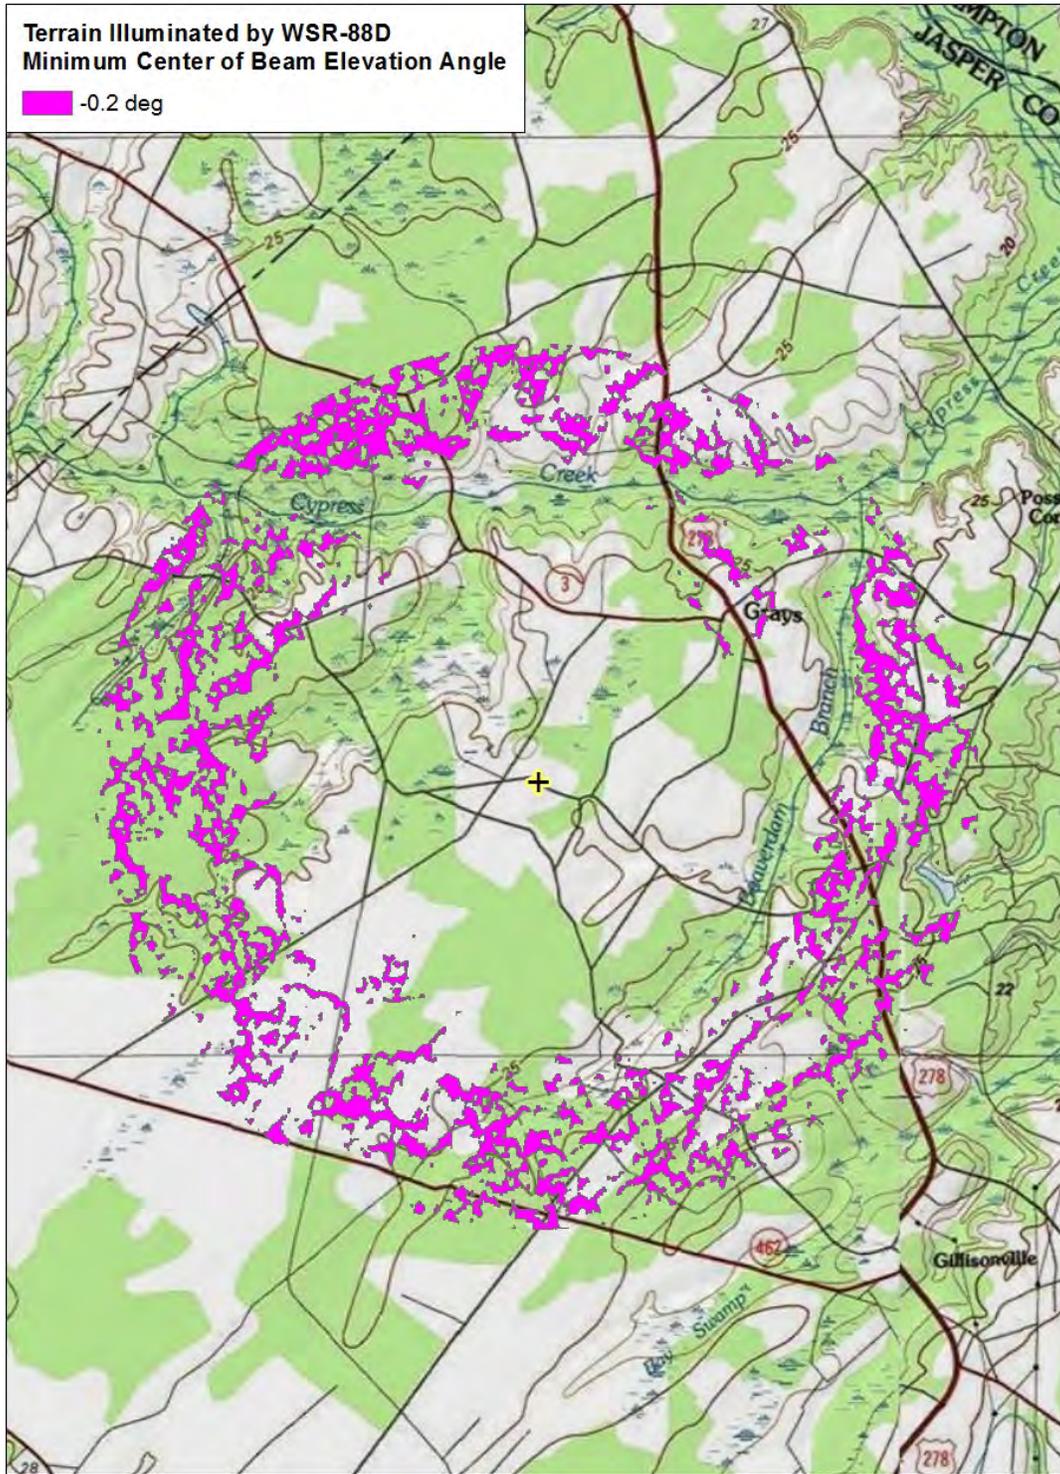

✚ KCLX - Charleston, SC

